




THE BUILDING PLAN SHOWING THE PROPOSED B+G+IV STORIED APARTMENT TYPE RESIDENTIAL BUILDING OF 1) SRI NANDALAL GHOSAL, S/O-LATE BINOY KRISHNA GHOSHAL 2) ANUDEB CONSTRUCTION PROPRITOR SRI ANUP GHOSAL 3) BIJOY ROY S/O LATE HARAPRASAD ROY AT KALYANPUR HOUSING ESTATE, PLOT NO.- F/7, F-10,&F-11, CORROSPONDING TO R.S. PLOT NO-1128, MOUZA-SITLA, JL. NO-21, WITH IN AMC WORD NO-22(NEW),OLD-30 P.S-ASANSOL(N) . UNDER ASANSOL MUNICIPAL CORPORATION.

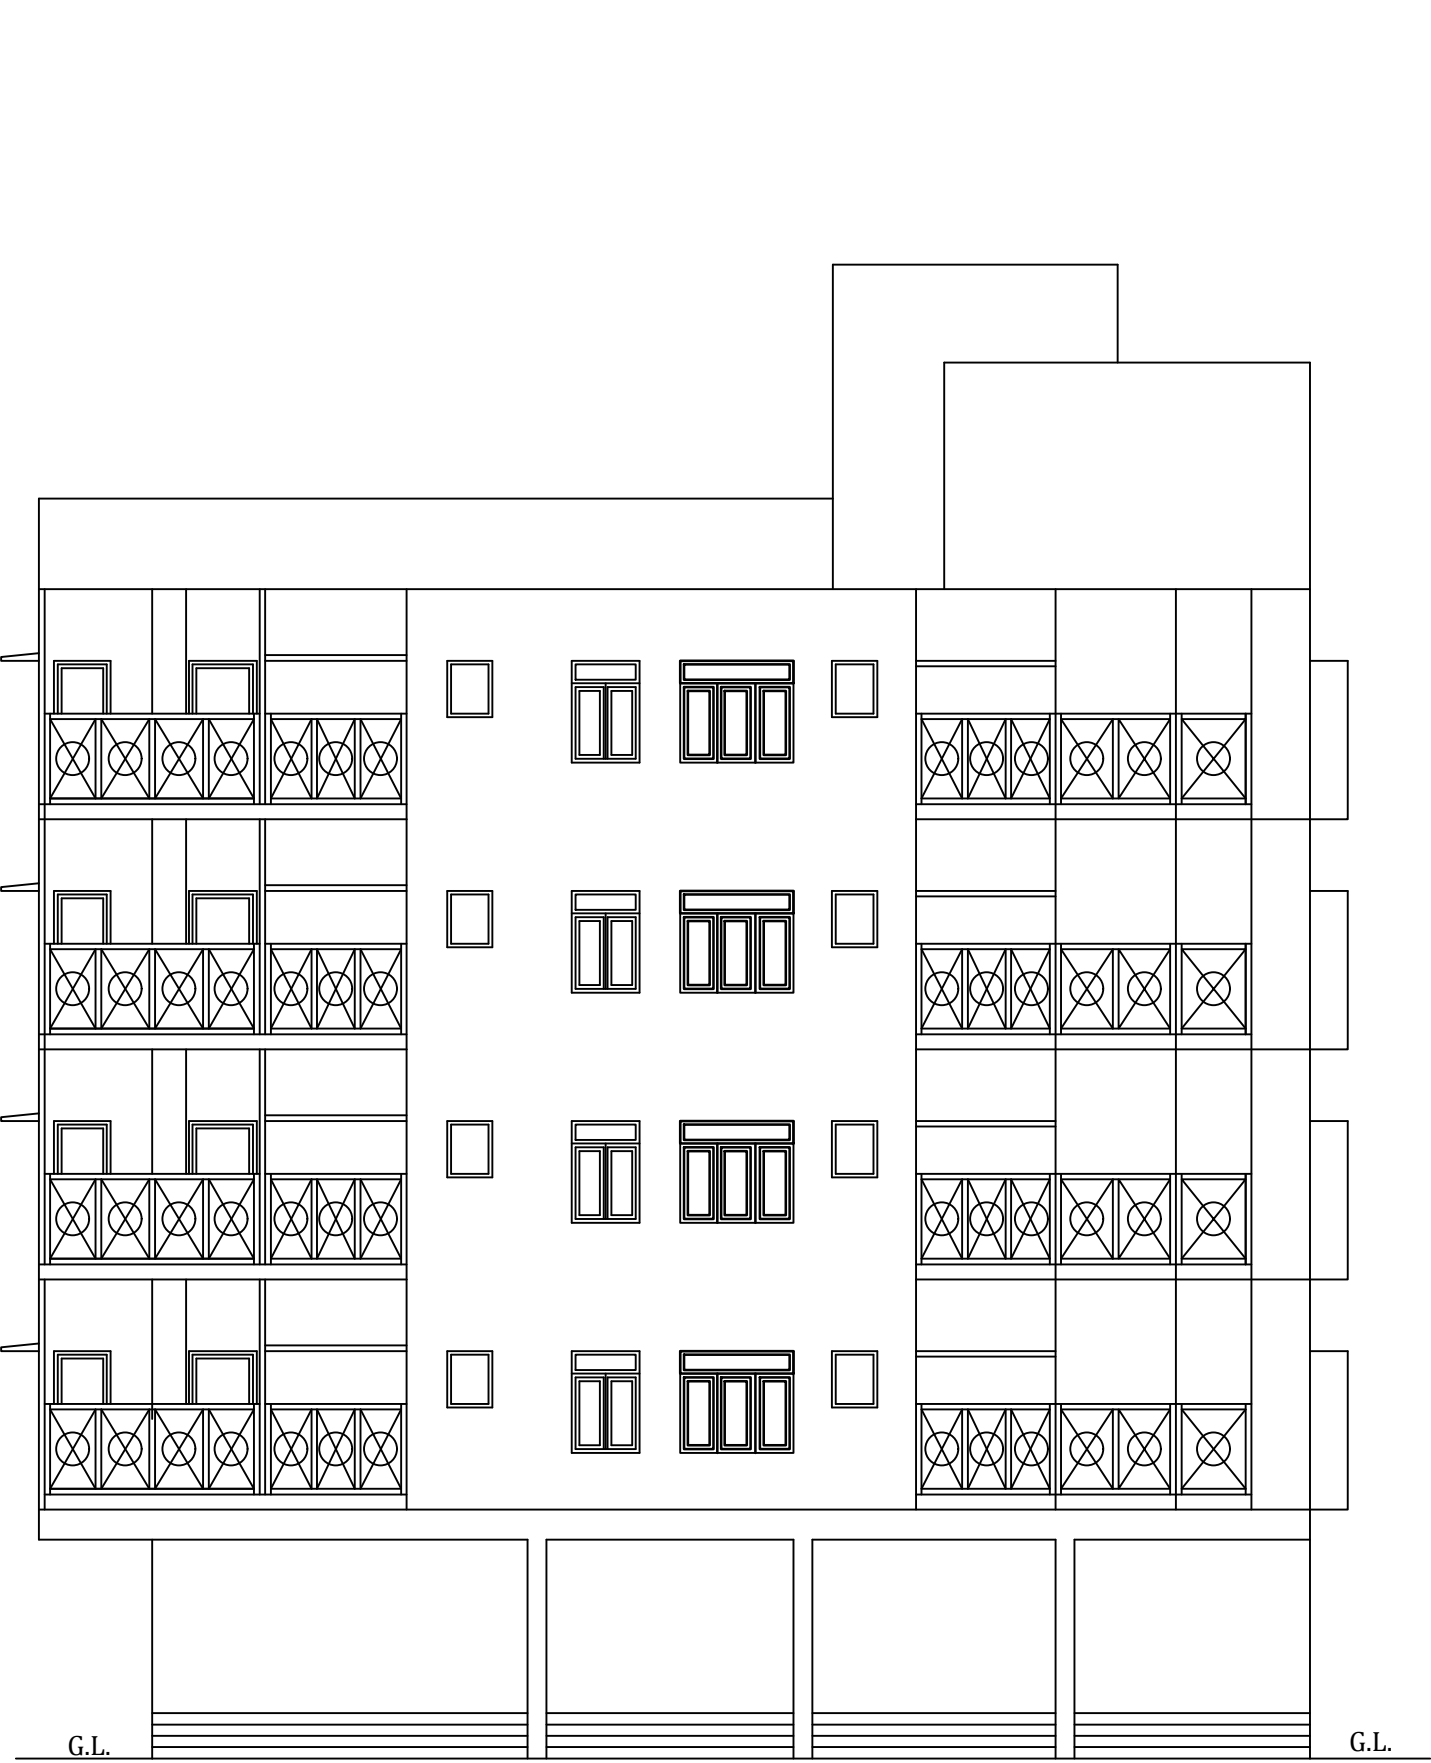

ELEVATION

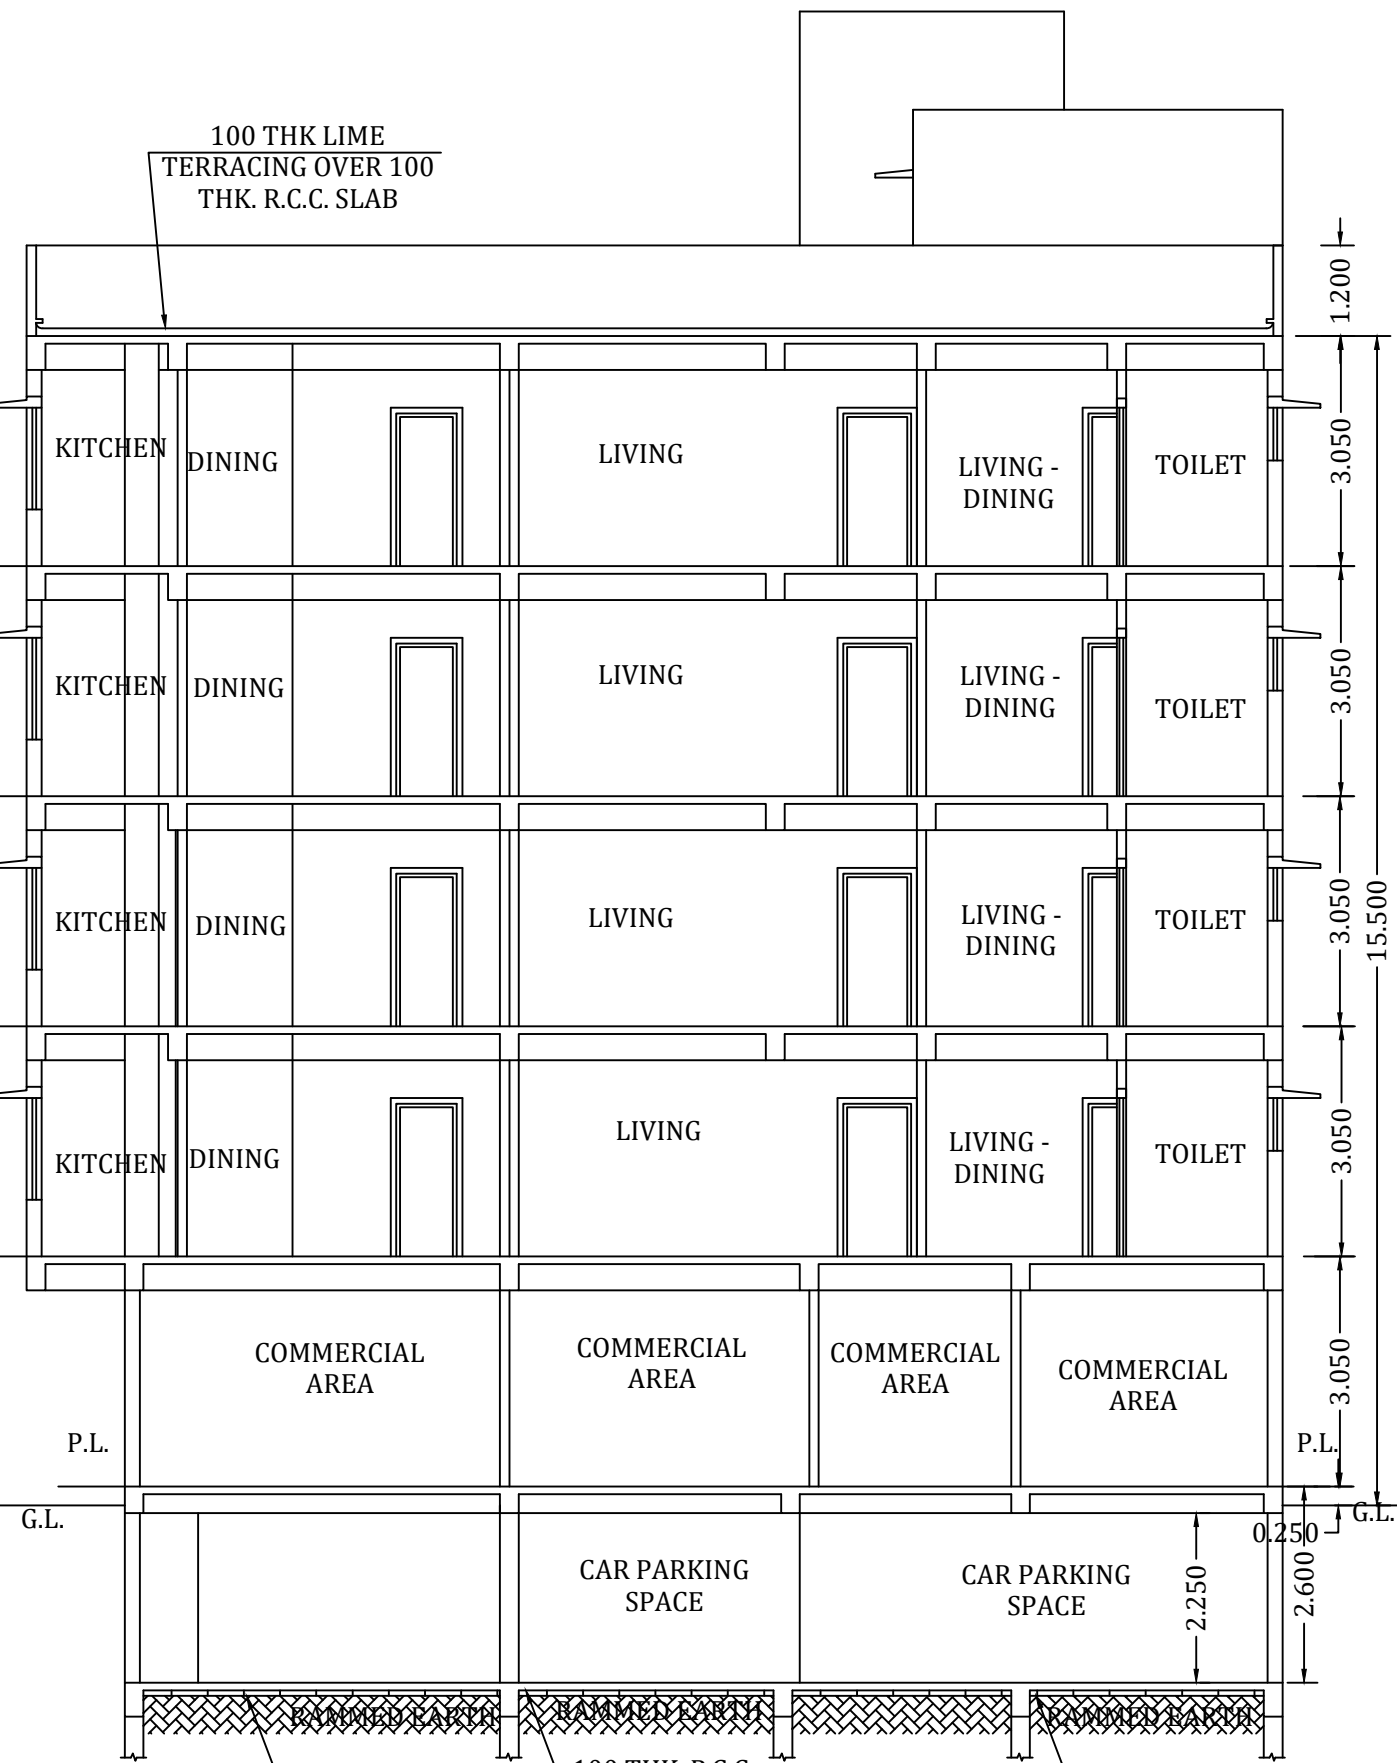

SECTION X-X'

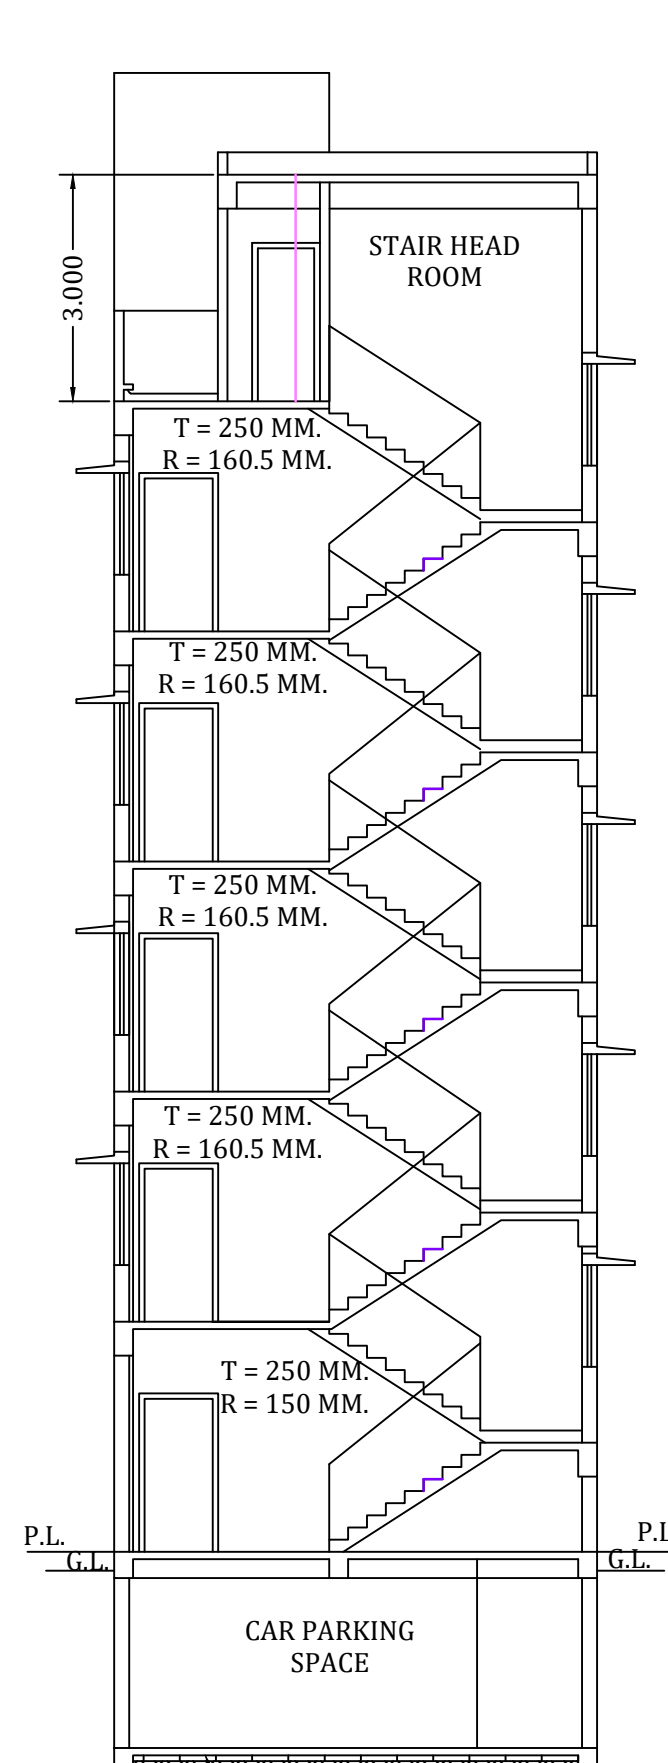


SECTION Z-Z'



SECTION Y-Y'

DOOR & WINDOW SCHEDULE			
MARK.	SIZE	MARK.	SIZE
W1	1.500 x 1.350	D1	1.050 x 2.100
W2	1.200 x 1.350	D2	0.900 x 2.100
W3	0.900 x 1.000	D3	0.750 x 2.100
W4	0.600 x 0.750	S.D.1	1.500 x 2.100
		S.D.2	1.800 x 2.100

AREA STATEMENT					
LAND AREA AS PER RECORD = 501.60 SQ.M EXISTING ACCESS: 9 METER WIDE ROAD. PERMISSIBLE F.A.R. : 2.25 PROPOSED HEIGHT : 15.50 M. PERMISSIBLE GROUND COVERAGE : 250.80 SQ.M. i.e (50%) PROPOSED GROUND COVERAGE : 246.15 SQ.M. (48.61%)					
FLOOR NAME	TOTAL AREA (SQ.M)	DEDUCTION (SQ.M)	BUILT UP AREA (SQ.M)	EXEMPTION (SQ.M)	FLOOR AREA FOR FAR
BASEMENT FLOOR	225.61	-	225.61	-	225.61
FLOOR GROUND	225.69	-	225.69	14.83	-
FIRST FLOOR	246.15	2.15	244.00	14.84	-
SECOND FLOOR	246.15	2.15	244.00	14.84	-
THIRD FLOOR	246.15	2.15	244.00	14.84	-
FORTH FLOOR	246.15	2.15	244.00	14.84	-
FLOOR TERRACE	8.29	-	8.29	-	-
TOTAL	1444.19	8.58	1435.29	98.56	225.61
F.A.R CALCULATION PROPOSED F.A.R.=1127.5/501.60=2.247 PARKING FOR COMMERCIAL:2 NO. PARKING FOR RESIDENTIAL : 8 NO.					

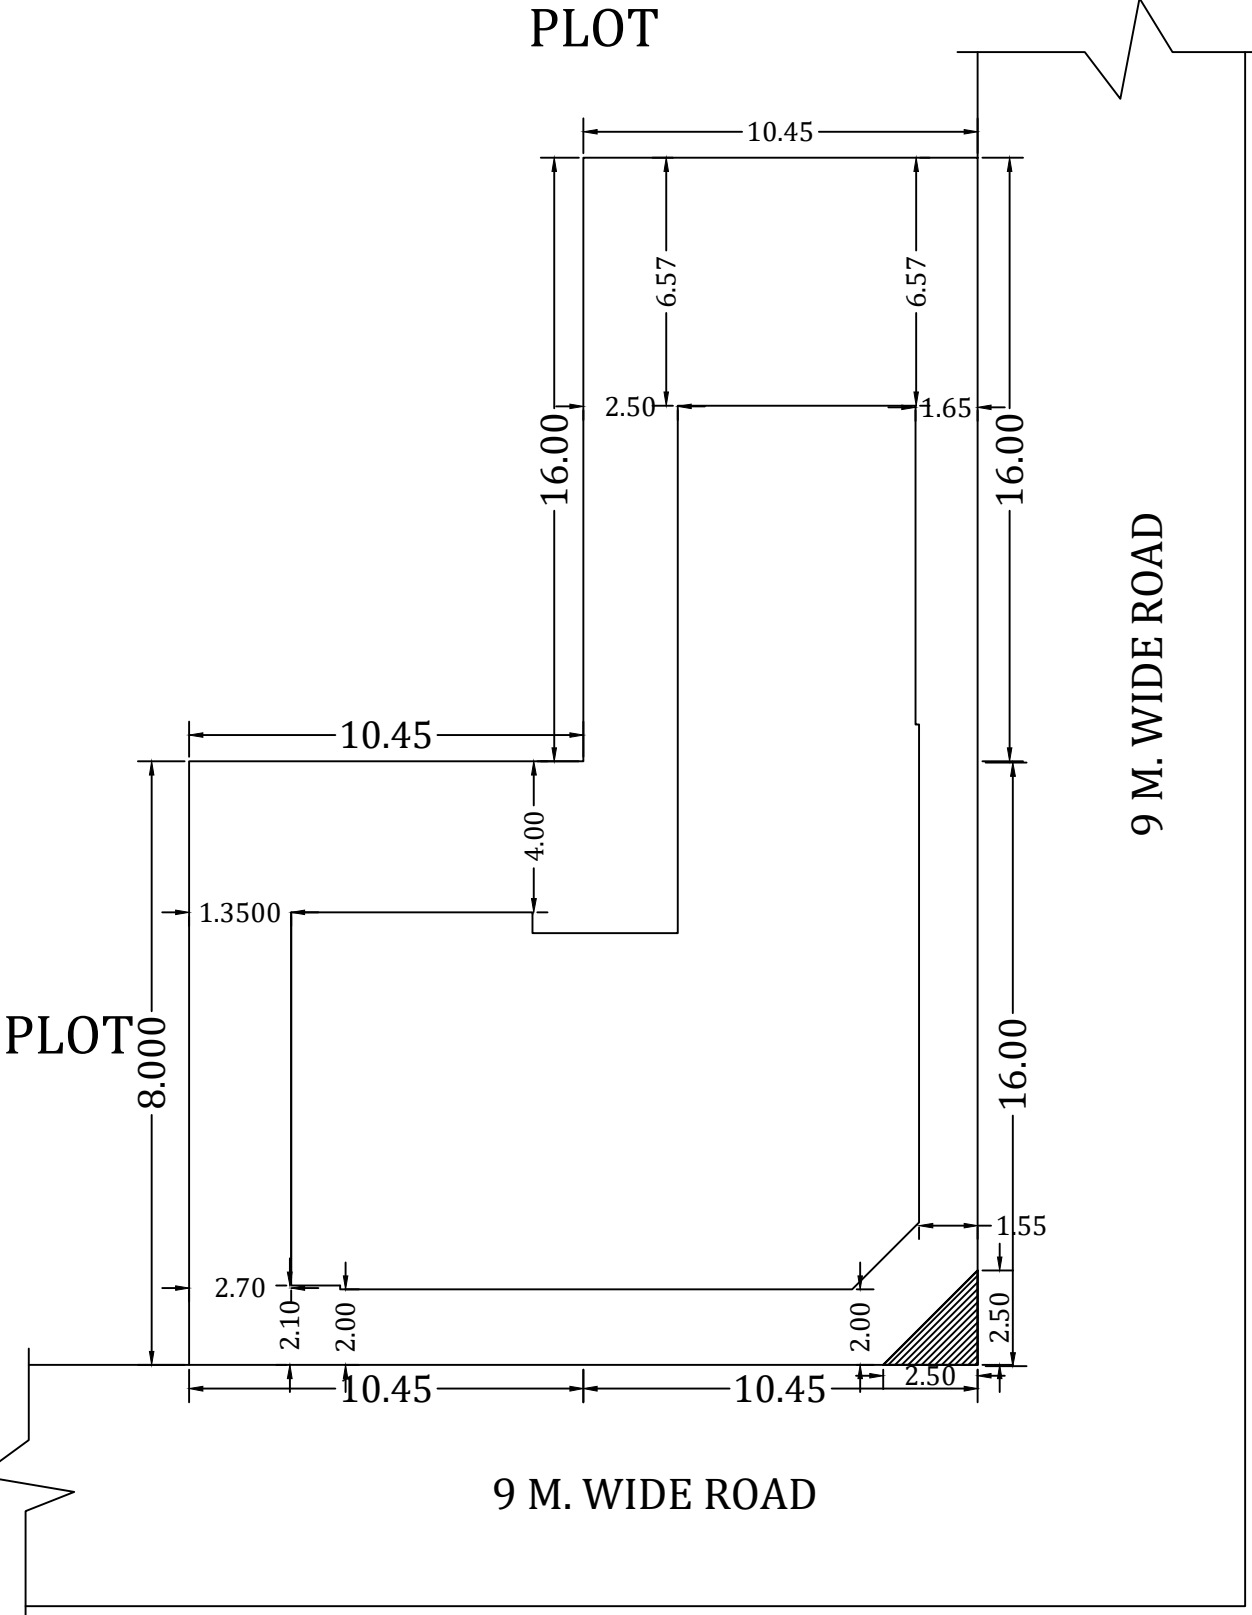


SITE PLAN

- SPECIFICATIONS**
- 75 TH. 1ST. CLASS BRICK SOLING IN FOUNDATION & FLOOR
 - 150 TH. 1:3:6 (CEMENT,SAND & KHOA) CEMENT CONCRETE IN FOUNDATION & FLOOR
 - FOUNDATION BRICK WORK WILL BE 1ST CLASS BRICK WITH 1:6 CEMENT MORTAR
 - 125 TH. & 75 TH. PARTITION BRICK WORK WILL BE 1:5 CEMENT MORTAR
 - 200TH. EXTERNAL WALLS WILL BE 1:6 CEMENT MORTAR
 - 25 TH. D.P.C. WILL BE 1:2:4 WITH PROPER WATER PROOFING COMPOUND
 - R.C.C. CONC. MIX WILL BE 1:2:4 CEMENT SAND & STONE CHIPS MATERIALS AND MIXING
 - ROOF AND LIME TERRACING WILL BE 100 TH. WITH THEIR PROPER
 - CEILING AND ALL R.C. PLASTER WILL BE 12mm. TH. 1:4 CEMENT MORTAR
 - 25 MM. TH. I.P.S. FLOORING
 - GRADE OF CONCRETE M - 20 .
 - ALL BUILDING MATERIALS WILL BE AS PER I.S. CODE & C.B.C. 1984


- NOTE:**
- ALL DIMENSIONS ARE IN MM. IF NOT STATED OTHERWISE
 - ALL EXTERNAL WALLS ARE 250 TH. AND INTERNAL WALLS ARE 75 TH.
 - SCALE - 1:100
 - SAFE BEARING CAPACITY OF SOIL 7 MT/SQ.M. ASSUMED
 - DEPTH OF SEPTIC TANK AND SEMI U.G. WATER RESERVOIR WILL NOT EXCEED THE DEPTH OF BUILDING FOUNDATION
 - ALL SORTS OF PRECAUTIONARY MEASURE WILL BE TAKEN AT THE TIME OF CONSTRUCTION
- DECLARATION OF ENGINEER:**
I HAVE CERTIFIED ON THE PLAN ITSELF WITH FULL RESPONSIBILITY THAT BUILDING RULES 1990 AS AMENDED FROM TIME TO TIME AND THAT THE SITE CONDITIONS INCLUDING THE ABUTTING ROAD CONFORM WITH THE PLAN AND THAT IT IS A BUILDABLE SITE AND NOT A TANK OR A FILLED UP LAND.

STRUCTURAL CERTIFICATE:
THE STRUCTURAL DESIGN AND DRAWING OF BOTH FOUNDATION AND CONSIDERING ALL POSSIBLE LOADS INCLUDING THE SEISMIC LOAD AS SUPER STRUCTURE OF THE BUILDING HAS BEEN MADE BY ME. PER NATIONAL BUILDING CODE OF INDIA AND CERTIFIED THAT IT IS SAFE AND STABLE IN ALL RESPECT.

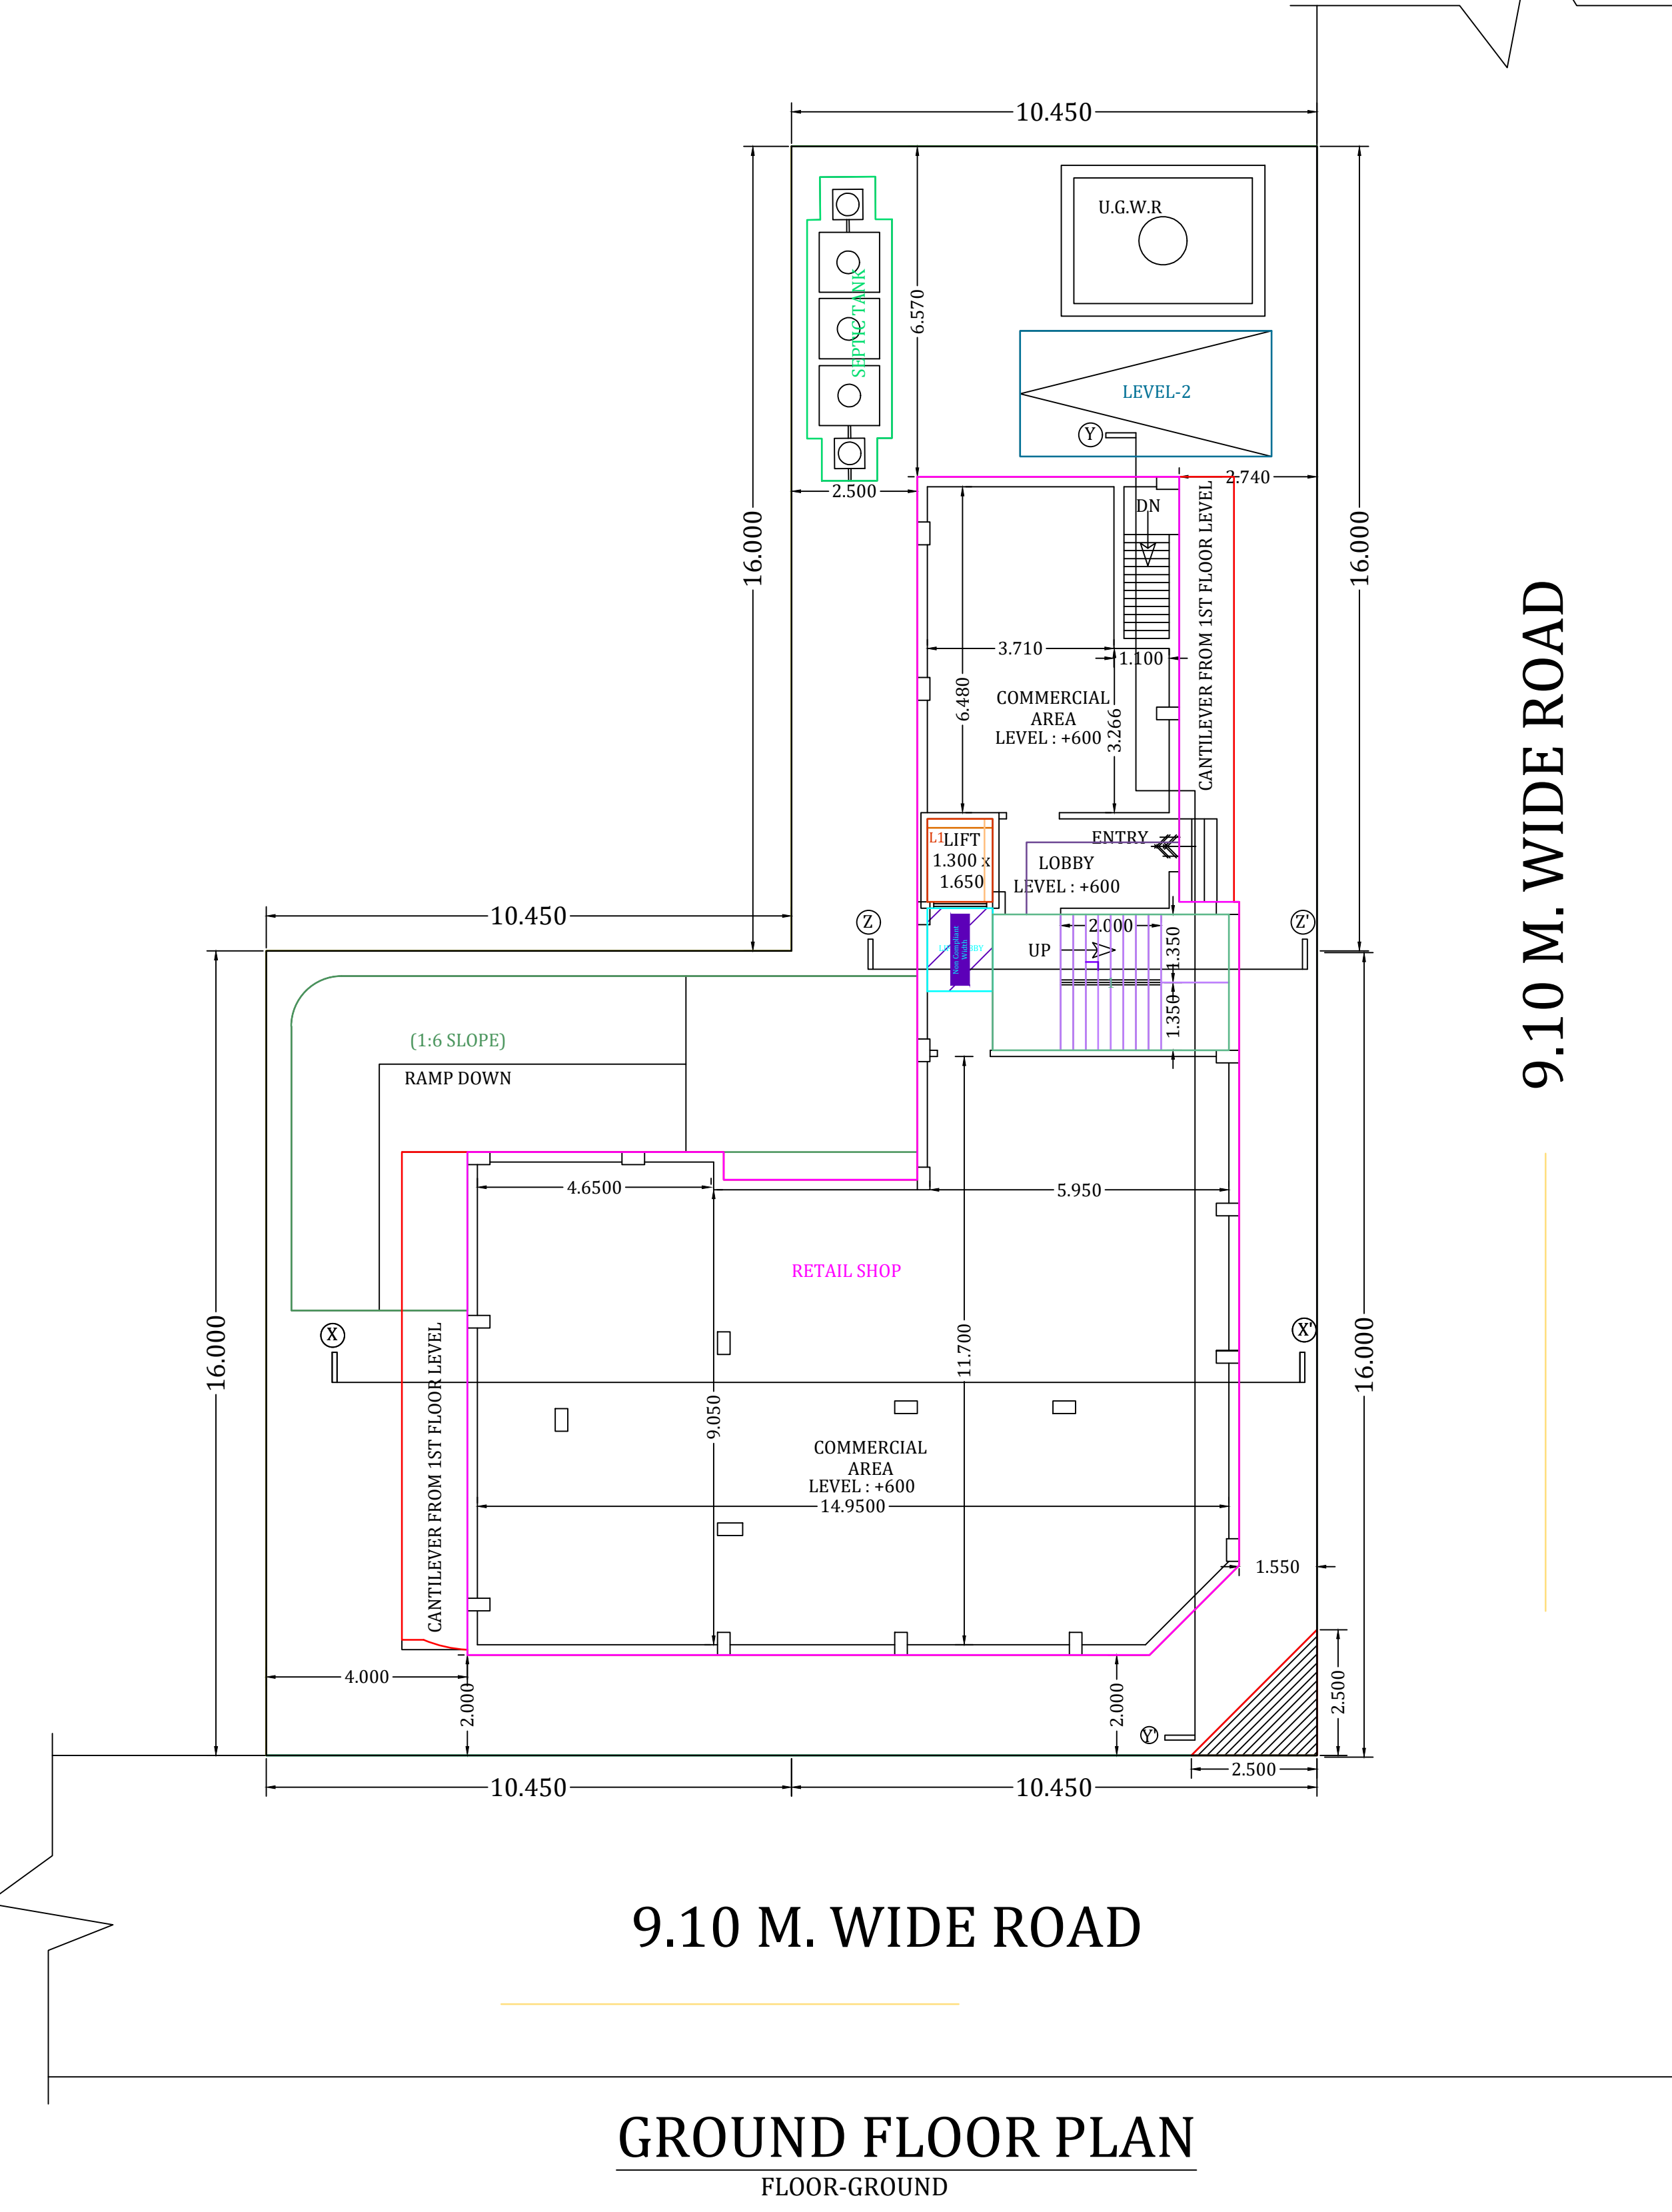


9.10 M. WIDE ROAD


GROUND FLOOR PLAN
FLOOR-GROUND

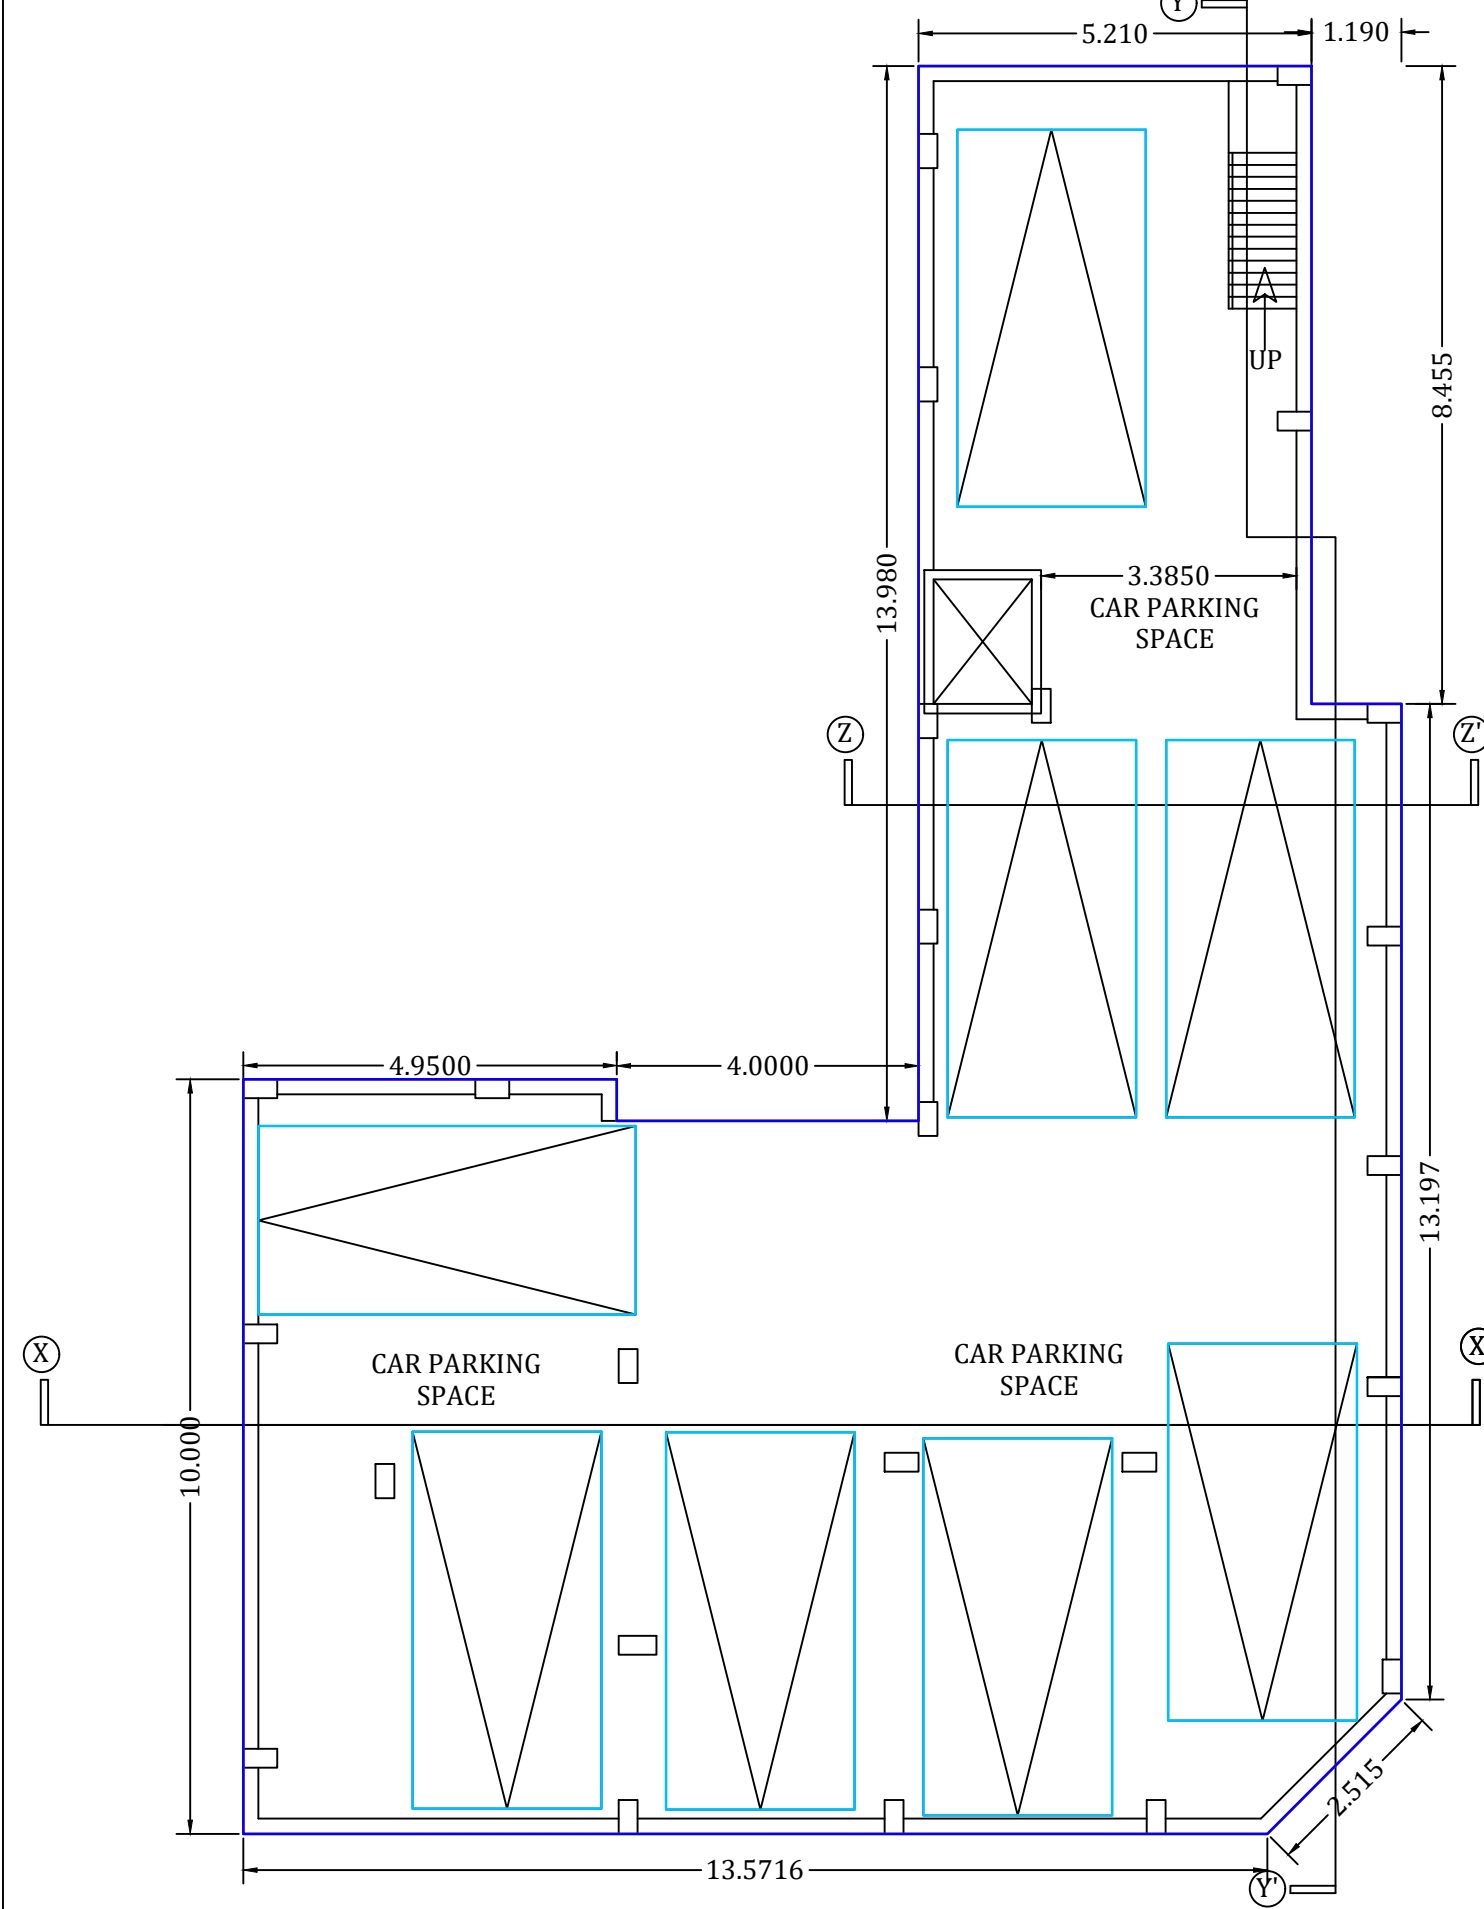

BASEMENT FLOOR PLAN
FLOOR-BF

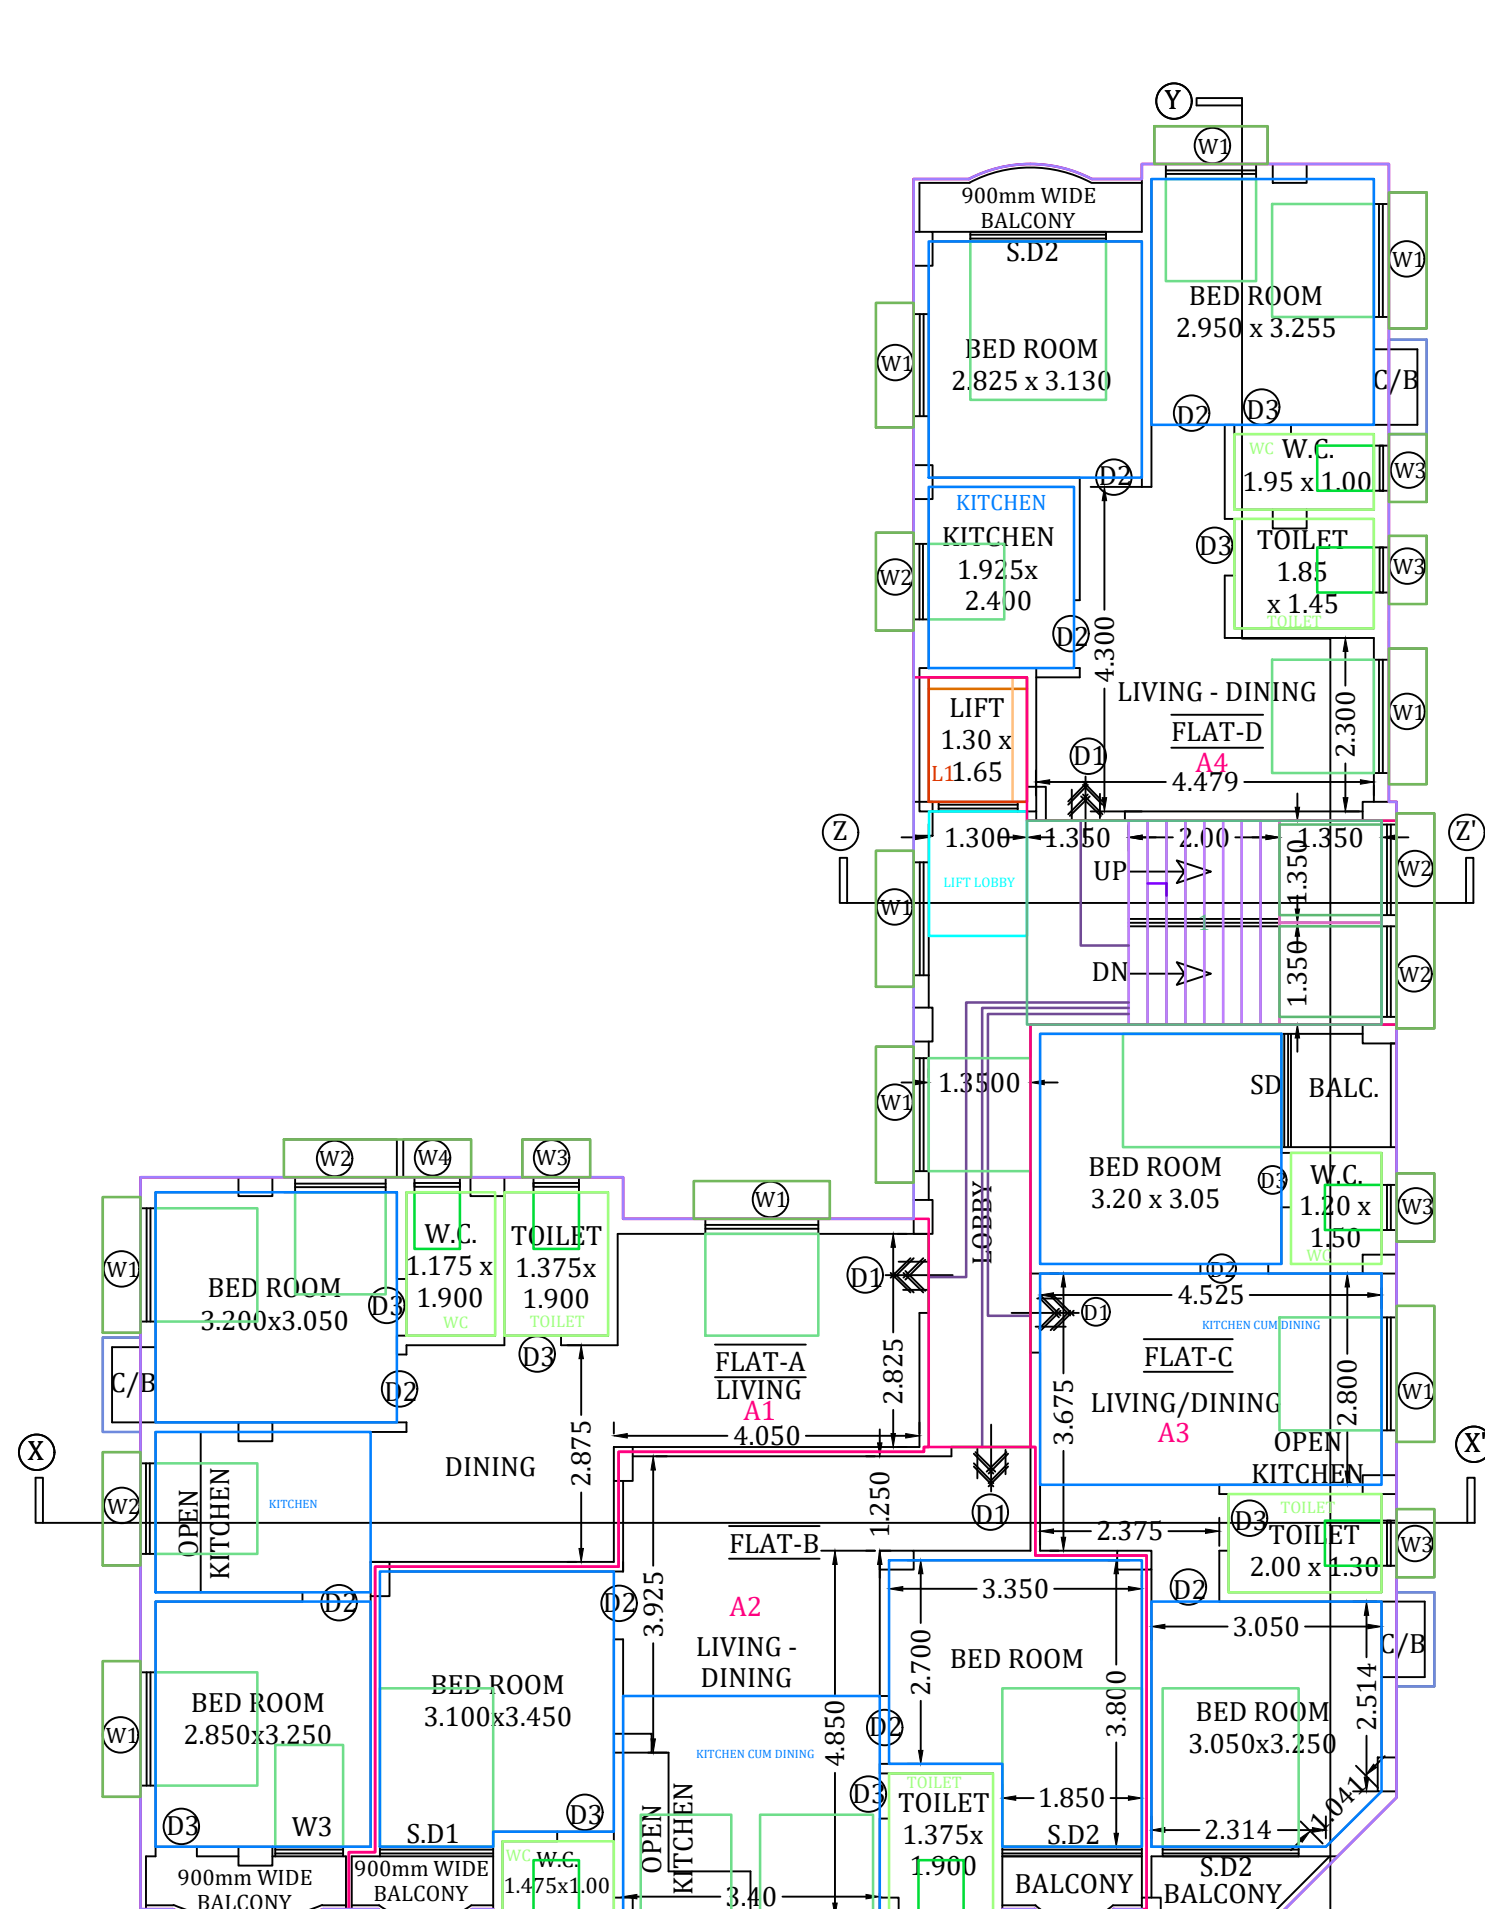

TYPICAL(1st,2nd,3rd,4th) FLOOR PLAN
FLOOR01,FLOOR02,FLOOR03,FLOOR04-TYPICAL

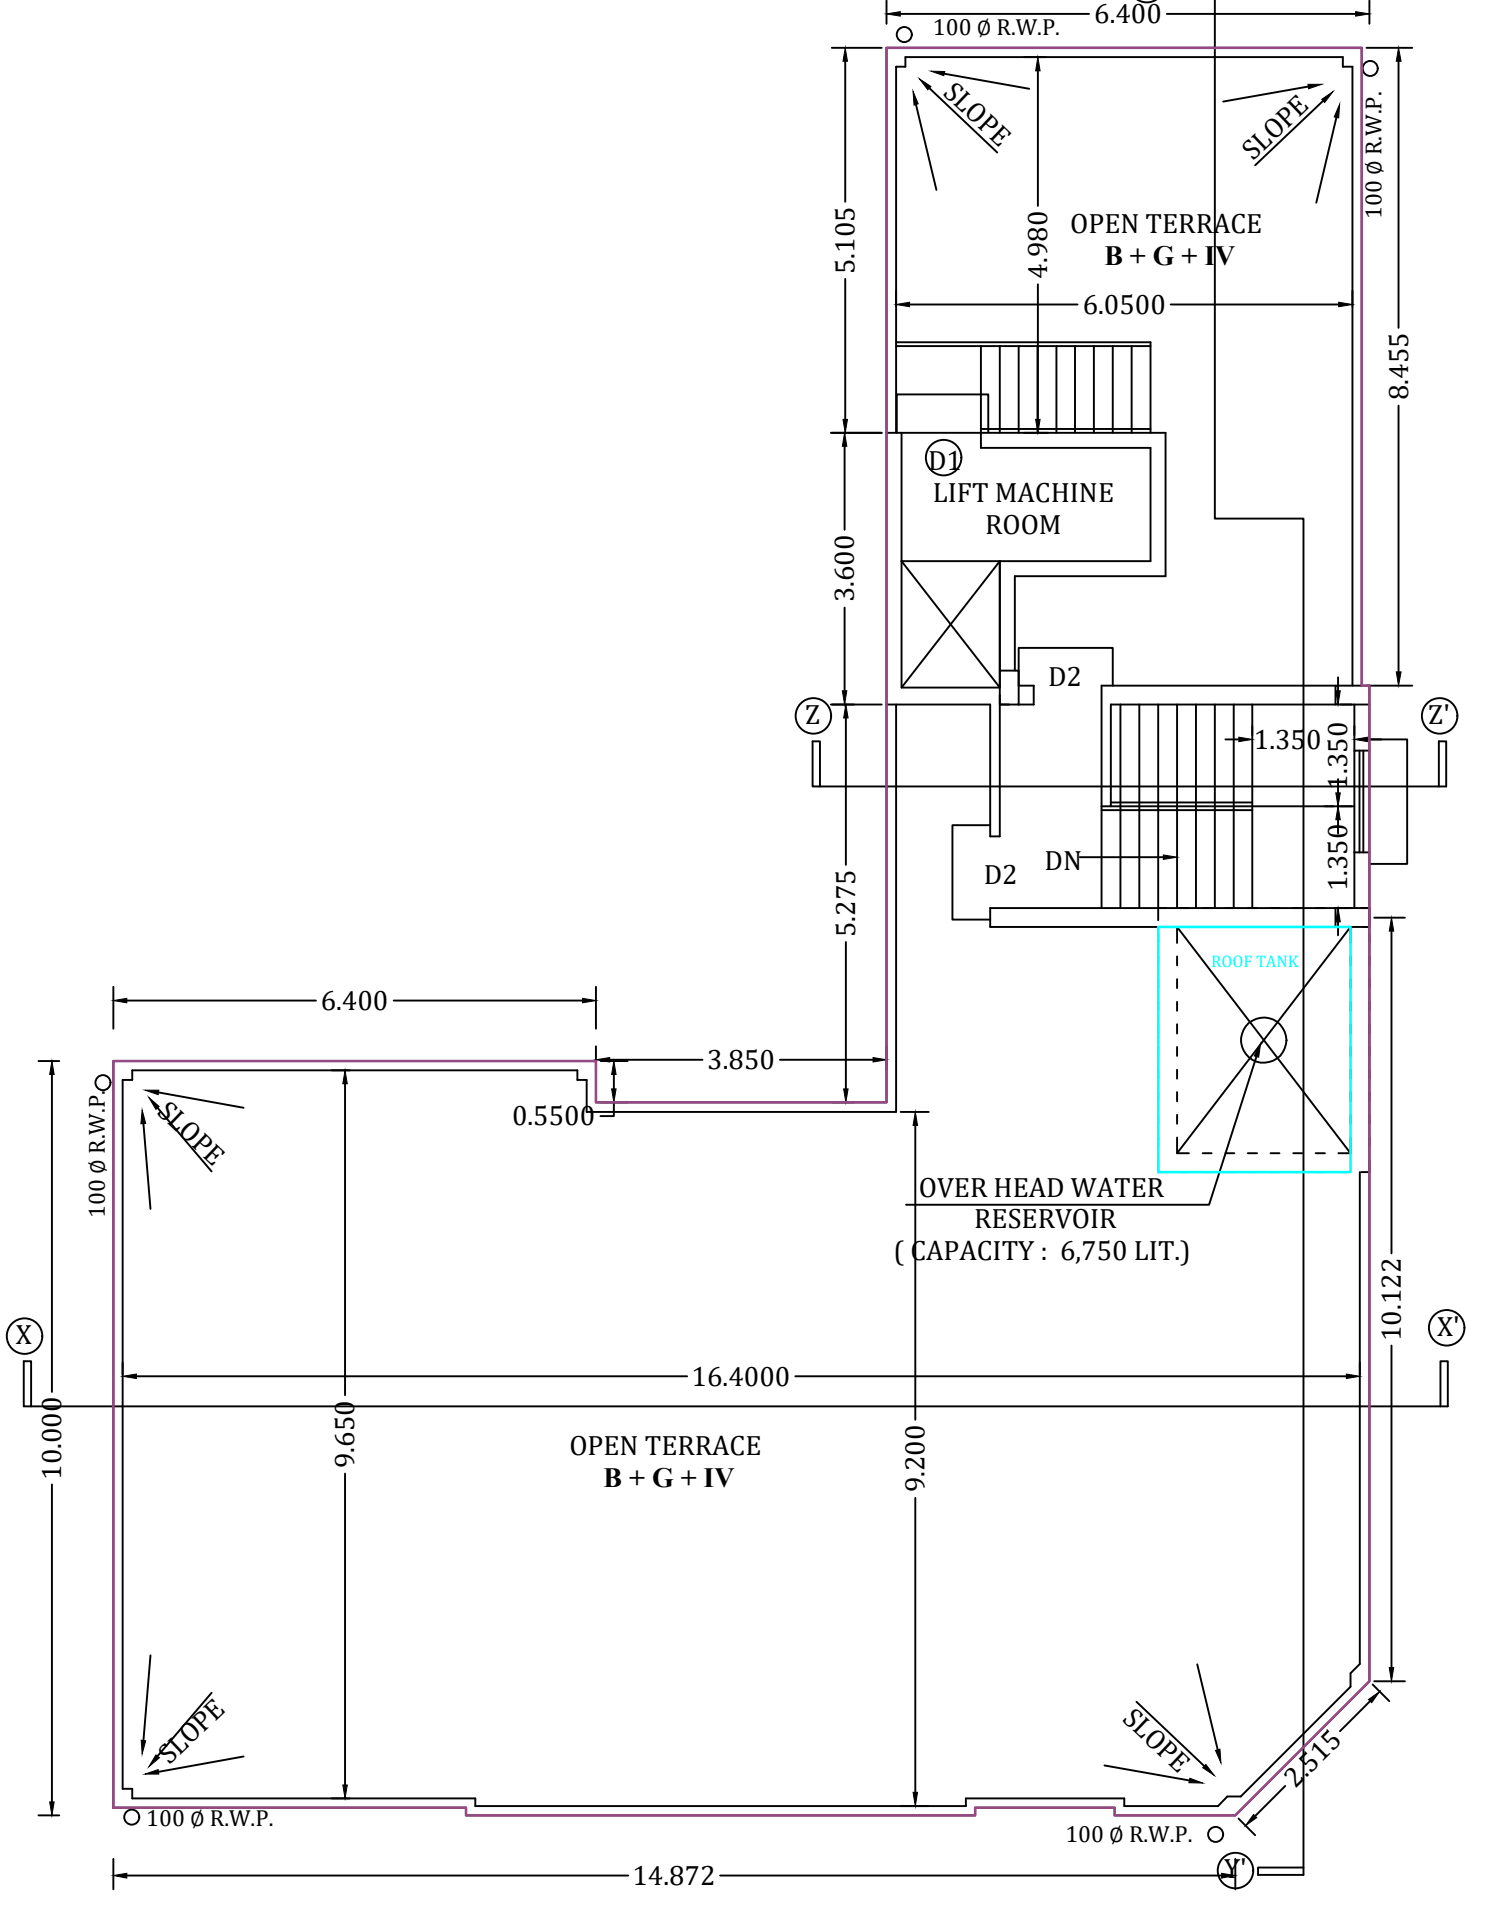

ROOF PLAN

SIGNATURE OF ENGINEER

SIGNATURE OF STRUCTURAL ENGINEER



SIGNATURE OF OWNER