




1ST FLOOR PLAN

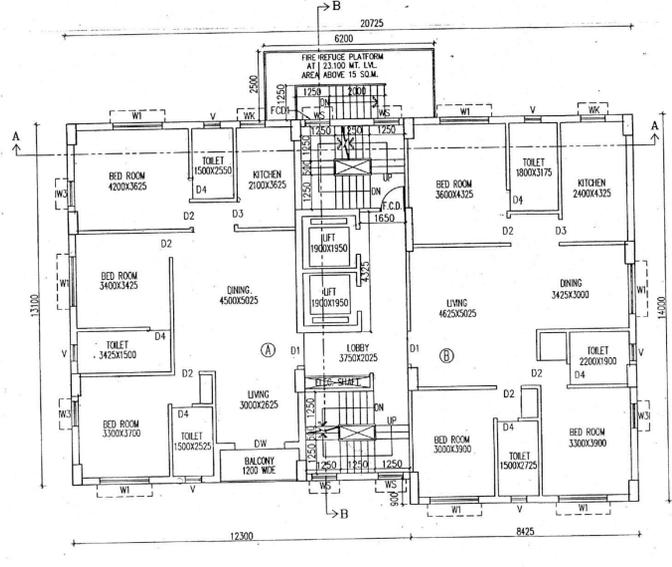


TYPICAL FLOOR PLAN  
(2ND TO 11TH FLOOR)

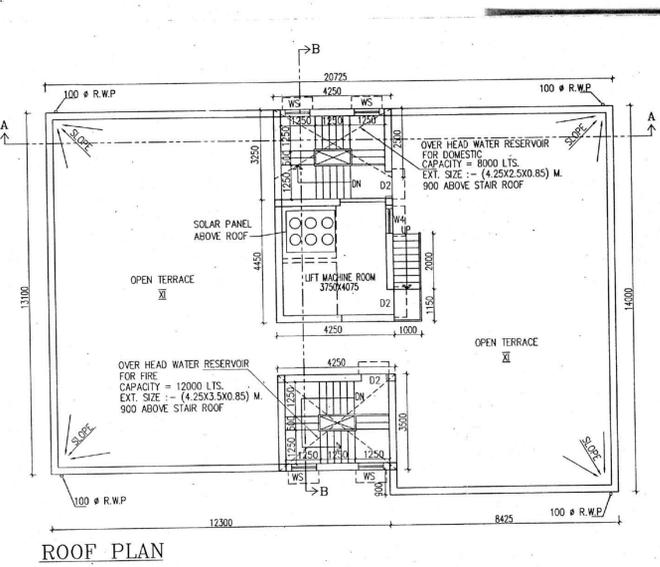


ROOF PLAN

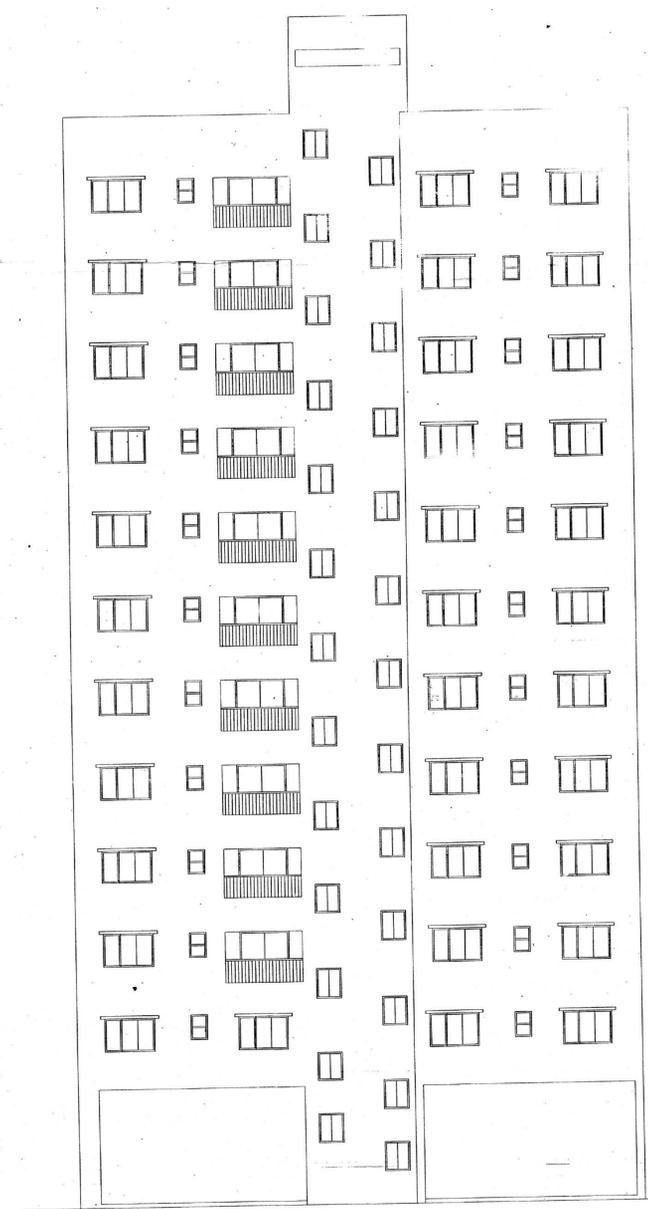

FRONT ELEVATION

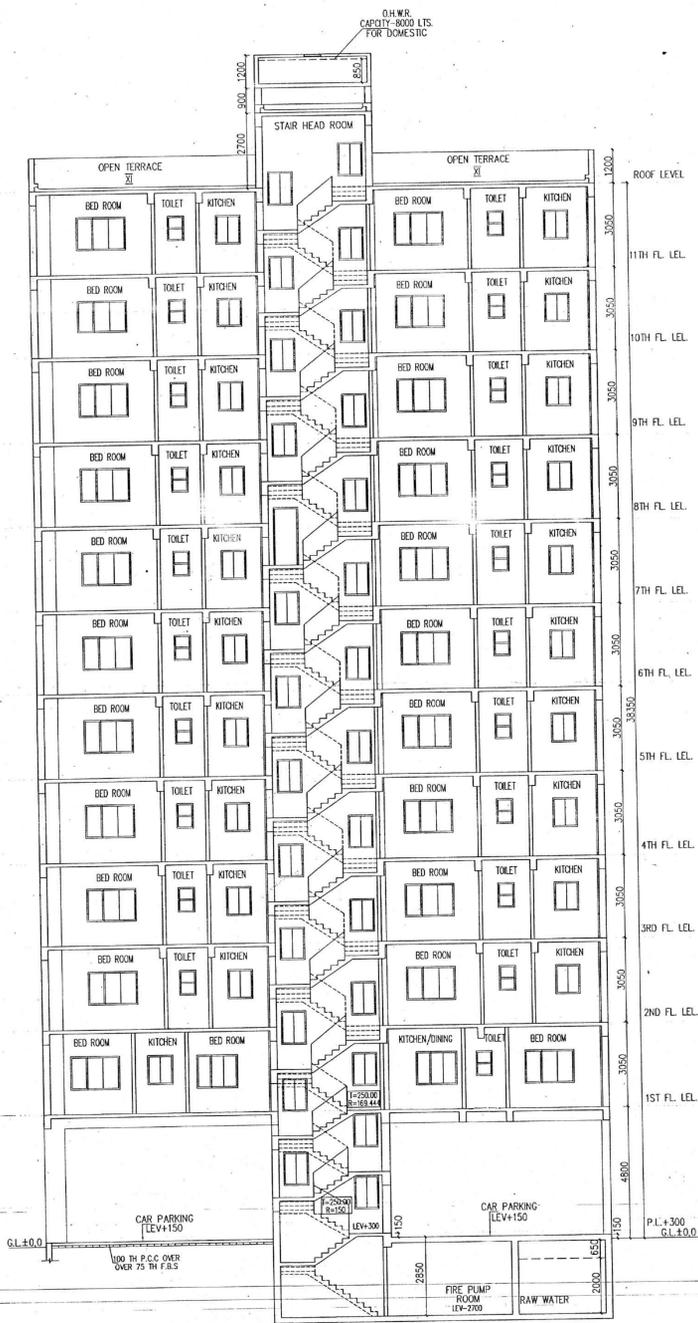

SECTION - AA

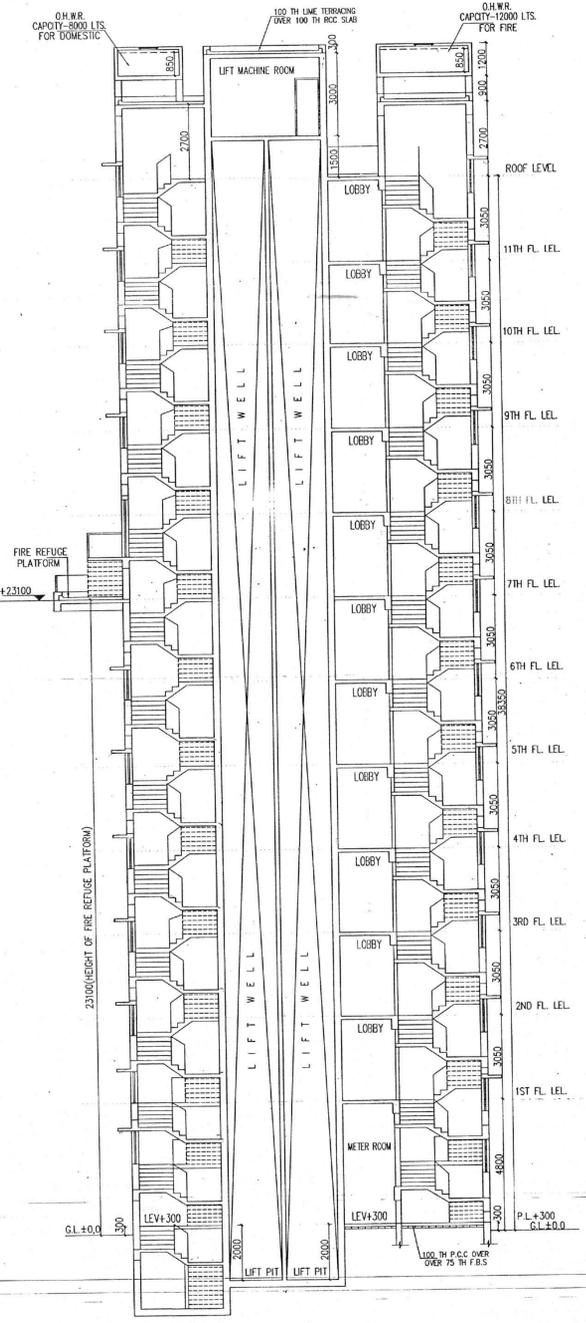

SECTION - BB

**SPECIFICATIONS**

R.C.C. FRAME STRUCTURE WITH CONC. GRADE 1:1.5:3  
 200 MM THK. EXTERNAL 125 & 75 MM THK. INTERNAL WALLS WITH  
 14 CMHT. MOISTE JOINTS.  
 STEEL 2-SECTION WINDOW  
 CAST-IN-SITU MASONRY FLOORING  
 1:6 & 1:4 CEMENT PLASTER ON INTERNAL WALLS AND CEILING RESPECTIVELY.  
 WATER PROOFING TREATMENT  
 F.P.P. FINISH ON INTERNAL WALLS & CEILING.

WINDOW SCHEDULE			
NOS.	MARK	SIZE	SILL LINTEL
1.	WT	1800X1200	900 2100
2.	WT	1500X1200	900 2100
3.	WT	900X1200	900 2100
4.	WK	900X1050	1050 2100
5.	WS	1500X1200	900 2100
6.	V	600X900	1200 2100

DOOR SCHEDULE			
NOS.	MARK	SIZE	SILL LINTEL
1.	D	1500X2100	- 2100
2.	D1	1200X2100	- 2100
3.	D2	900X2100	- 2100
4.	D3	825X2100	- 2100
5.	D4	750X2100	- 2100
6.	DW	1800X2100	- 2100

- CERTIFICATE OF OWNER**
- I ENGAGED ARCHITECT AND E.S.E DURING CONSTRUCTION
  - I FOLLOWED THE INSTRUCTIONS OF ARCHITECT AND E.S.E DURING CONSTRUCTION OF THE BUILDING.
  - K.M.C AUTHORITY WILL NOT BE RESPONSIBLE FOR STABILITY OF BUILDING AND ADJOINING STRUCTURE.
  - IF ANY SUBMITTED DOCUMENT IS FOUND TO BE FAKE THE K.M.C AUTHORITY MAY REVOKE THE SANCTION PLAN.
  - THE CONSTRUCTION OF WATER RESERVOIR AND SEPTIC TANK EXECUTED UNDER THE GUIDANCE OF ARCHITECT & E.S.E

For & on behalf of  
 ARJUN MITRA  
 ANANJAN MITTER  
 NILANJAN MITTER  
*Rudip Kumar Jain*  
 Constituted Attorney

SIGNATURE OF OWNER

**CERTIFICATE OF GEOTECH ENGINEER**

UNDERSIGNED HAS INSPECTED THE SITE AND CARRIED OUT SOIL INVESTIGATION THEREIN. IT IS CERTIFIED THAT THE EXISTING SOIL OF THE SITE IS ABLE TO CARRY THE LOAD COMING FROM THE PROPOSED CONSTRUCTION AND THE FOUNDATION SYSTEM PROPOSED HEREIN IS SAFE & STABLE IN ALL RESPECT FROM GEO-TECHNICAL POINT OF VIEW.

*Rupak Kumar Banerjee*  
 RUPAK KUMAR BANERJEE  
 B.C.E., M.E., MFGS  
 M.A.E., CHARTERED ENGINEER  
 ENLISTED GEO TECHNICAL ENGINEER (G.T.E.)  
 G.T.E. NO. 141-4273, 14-143373-5

SIGNATURE OF GEOTECH ENGINEER

**CERTIFICATE OF STRUCTURAL ENGINEER**

CERTIFIED THAT, "THE STRUCTURAL DESIGN & DRAWINGS OF BOTH FOUNDATION & SUPER STRUCTURE OF THE BUILDING HAS BEEN MADE BY ME CONSIDERING ALL POSSIBLE LOADS INCLUDING THE SEISMIC LOAD AS PER THE NATIONAL BUILDING CODE OF INDIA & CERTIFIED THAT IT IS SAFE & STABLE IN ALL RESPECTS".

*Sanjiv Parekh*  
 SANJIV PAREKH  
 M.E. (STRUCT.), M.E. (CONSTR.), MFGS  
 B.C.E., F.I.E.(P-418202-4)  
 E.S.E. NO. 104 (I) K.M.C.

SIGNATURE OF STRUCTURAL ENGINEER

*Sanjib Guha*  
 SANJIB GUHA  
 BSC, B.C.E., F.I.E.(118554-5)  
 CHARTERED ENGINEER  
 ENLISTED STRUCTURAL REVIEWER WITH K.M.C.

SIGNATURE OF STRUCTURAL REVIEWER

**CERTIFICATE OF ARCHITECT**

THE I.B.A. HAS CERTIFIED ON THE PLAN ITSELF WITH FULL RESPONSIBILITY THAT THE BUILDING PLAN HAS BEEN DRAWN UP AS PER PROVISION OF K.M.C. BLDG. RULES 2009, AS AMENDED FROM TIME TO TIME AND THAT THE SITE CONDITION INCLUDING THE WIDTH OF THE ADJOINING ROAD CONFORM WITH THE PLAN AND IT IS A BUILD ABLE SITE AND NOT A TANK OR A FILLED UP TANK.

*Rajkumar Agarwal*  
 Rajkumar Agarwal  
 Architect  
 Member of Council of  
 Architecture CA/94/17940

SIGNATURE OF ARCHITECT

**TITLE**

1ST FLOOR PLAN, TYPICAL FLOOR PLAN (2ND TO 11TH), ROOF PLAN, FRONT ELEVATION, SECTION - AA, BB.

**PROJECT**

PROPOSED G+XI (38.35 M. HT.) STORED RESIDENTIAL BUILDING AT PRE NO. 22/1A, CHAKRABHARE ROAD, KOLKATA - 700025, WARD NO. = 070, BOROUGH-VIII, U/S 393 OF BUILDING RULE 2009.

DRG. NO.	DATE	DEALT
ARCH-2/2	20.11.19	PITAYI/SULAGNA

SCALE - 1:100

**ARCHITECT**

RAJ AGARWAL & ASSOCIATES  
 8B, ROYD STREET,  
 KOLKATA - 70