

PARTY'S COPY

30.1.18


Plan for Water Supply arrangement, including SELLU, O. & H. reservoir, should be submitted to the Building Engineer for approval and the sanction obtained before proceeding with the work of Water Supply any extension being made by the Building Engineer.

No rain water pipe should be fixed or discharged on Road or Footpath. Rain water should be collected at the Building Engineer's Office and the sanction obtained before proceeding with the drainage work.

A suitable tank to be provided to receive rain water for the distribution to the lighting esters and urns in the building. Rain water from street main is not available.

REVISION WOULD BEAN PENULTIMATE
Not Commencement of Erection
Re-Erection within Two Year
will require fresh Application
for sanction.

Approved By: *[Signature]*
The Building Engineer

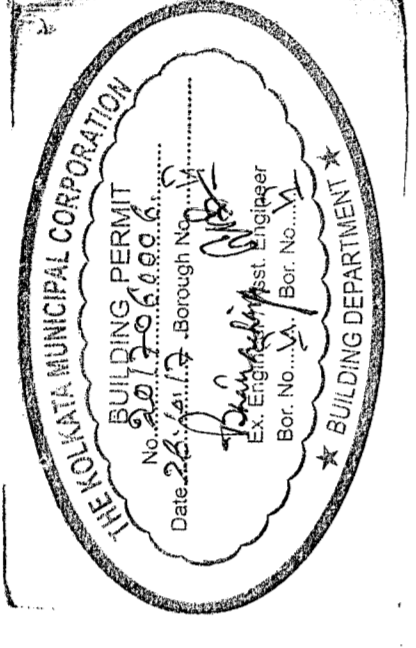

Buildings within the Corporation limits who must conform with the plans sanctioned and all foundations as proposed in the plan should be approved by the Building Engineer. The validity of the written permission to execute the work is subject to the above conditions.

Plans of all Structural Members including that of the foundation should conform to Standards laid down in the National Building Code of India.

All Building Materials to necessary & construction should conform to the standards specified in the National Building Code of India.

THE SANCTION IS VALID UP TO 30.1.2022.

APPROVED BY ASSISTANT ENGINEER (C) BANGALORE. NO.

Approved Subject to Conditions of requisition of Water Supply Services if any.

* Permission for use of solar energy in the form of solar heater and / or solar photovoltaic shall be provided as required under Rule 147 of Building Under, 2002 and the application certificate will not be issued in case of building having such provision.

Shaded portions in sections conditionally approved shall be constructed over II portion will be free grid to the K. C. and no wall can be constructed over II.

The Building Materials that will be stacked on Road/Passage or Foot-path should be covered with a tarpaulin sheet of 100 GSM weight. The construction of C. Floor shallower the construction shall be approved by the K.M.C. at the discretion of the officer.

CONSTRUCTION SITE SHALL BE MAINTAINED TO THE SATISFACTION OF THE BUILDING ENGINEER SO THAT ALL WATER COLLECTION & PARTICULARLY LEFT WELLS, WISE, BURNING DURING STREETS, OPEN DRAINAGE SYSTEMS TO NOT BE DAMAGED COMPARTMENT TWICE WEEK.

RESIDENTIAL BUILDINGS