


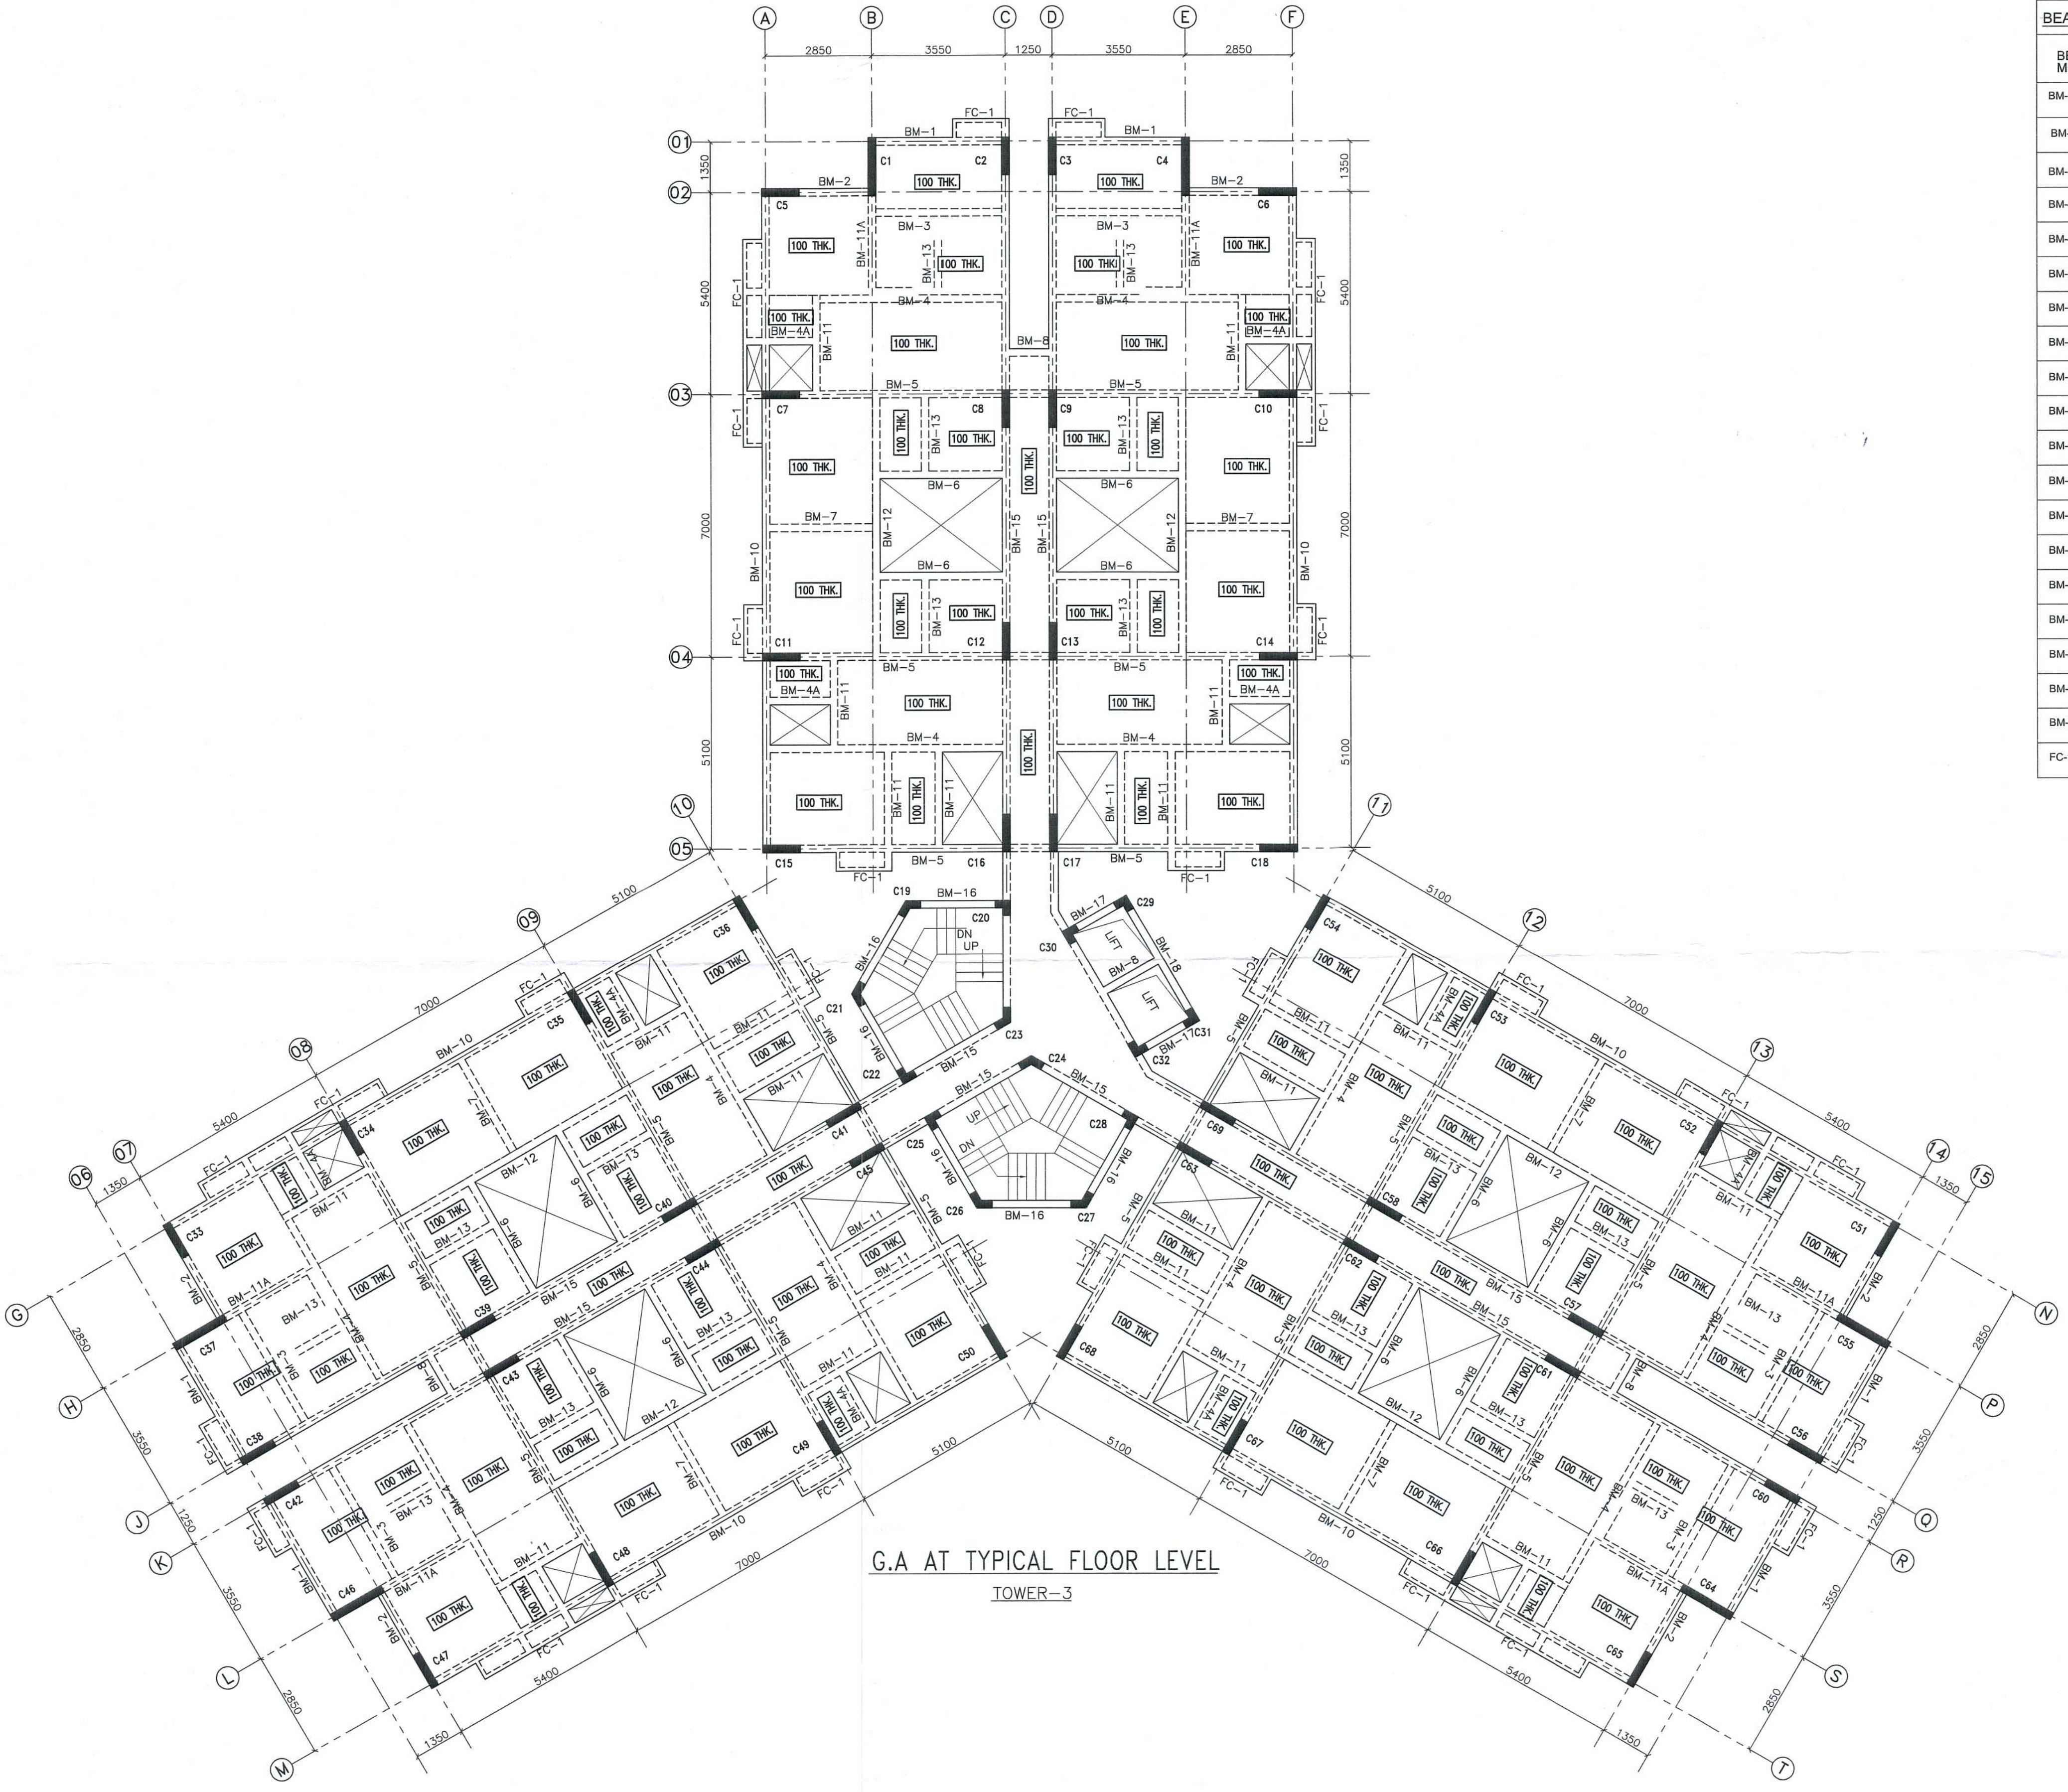

BEAM SCHEDULE FOR TOWER-3							
BEAM MKD.	BEAM SIZE	SUPPORT REINFORCEMENT			SPAN REINFORCEMENT		
		TOP	BOTTOM	STIRRUPS	TOP	BOTTOM	STIRRUPS
BM-1	200X600	3-25T +3-16T	3-25T	8T@100C/C	2-25T +3-16T	8T@150C/C	
BM-2	200X600	3-20T +3-16T	3-20T	8T@100C/C	2-20T 3-20T	8T@150C/C	
BM-3,8,11	200X400	2-16T	3-20T	8T@100C/C	2-16T 3-20T	8T@150C/C	
BM-4	200X600	3-20T	3-25T	8T@100C/C	3-20T 3-25T	8T@150C/C	
BM-4A	200X500	2-16T	3-16T	8T@100C/C	2-16T 3-16T	8T@150C/C	
BM-5	200X600	3-25T +3-20T	3-25T	8T@100C/C	2-25T 3-20T	8T@150C/C	
BM-6	200X600	2-16T	3-20T	8T@100C/C	2-16T 3-20T	8T@150C/C	
BM-7	200X400	2-16T	3-20T	8T@100C/C	2-16T 3-20T	8T@150C/C	
BM-8	200X400	2-16T	3-16T	8T@100C/C	2-16T 3-16T	8T@150C/C	
BM-10	200X600	3-25T +3-20T	3-25T	8T@100C/C	2-25T 3-25T	8T@150C/C	
BM-11	200X400	2-16T	3-20T	8T@100C/C	2-16T 3-20T	8T@150C/C	
BM-11A	200X500	3-25T +3-16T	3-25T	8T@100C/C	2-25T 3-25T	8T@150C/C	
BM-12	200X600	3-20T	3-25T	8T@100C/C	3-20T 3-25T	8T@150C/C	
BM-13	200X400	2-16T	3-16T	8T@100C/C	2-16T 3-16T	8T@150C/C	
BM-15	200X600	3-25T +3-20T	3-25T	8T@100C/C	2-25T 3-20T	8T@150C/C	
BM-16	200X600	3-25T +3-16T	3-25T	8T@100C/C	2-25T 3-25T	8T@150C/C	
BM-17	200X500	3-20T	3-20T	8T@100C/C	3-20T 3-20T	8T@150C/C	
BM-18	200X600	3-20T +3-16T	3-20T	8T@100C/C	2-20T 3-20T	8T@150C/C	
BM-19	200X500	3-20T	3-20T	8T@100C/C	3-20T 3-20T	8T@150C/C	
FC-1	100X600	2-12T	2-12T	8T@150C/C	2-12T 2-12T	8T@150C/C	

SLAB SCHEDULE							
SLAB THK.	SHORT SPAN				LONG SPAN		
	SUPPORT	TOP	MID SPAN	BOTTOM	SUPPORT	TOP	MID SPAN
150	10 #	Ø150C/C	10 #	Ø200C/C	10 #	Ø150C/C	10 #
125	8 #	Ø150C/C	8 #	Ø150C/C	8 #	Ø150C/C	8 #

PROJECT
PROPOSED G+12 STOREYED AFFORDABLE HOUSING UNDER PRADHAN MANTRI AWAS YOJANA AT MUNICIPAL HOLDING NO. 31, KANAILAL GOSWAMI SARANI, UNDER CIRCLE NO. 'F', OF THE SERAMPORE MUNICIPALITY COMPRISED IN L.R. DAG NOS. 2588, 2589, 2597, 2598, 2603, 2604, 2605, 2607, 2608, 2609, 2610, 2611, 2612, 2614, 2615, 2616, 2617, 2618, 2619, 2620, 2621, 2622, 2623, 2624, 2625, 2626, 2627, 2628, 2629, 2631, 2642, MOUZA: MAHESH, P.S. SERAMPORE, J.L.: 15, L.R. KHATIAN NO. 11337, P.O. SERAMPORE, PIN: 712201, DISTRICT HOOGHLY, WEST BENGAL.

TITLE
GA. OF TYPICAL FLOOR , FLOOR BEAM & SLAB SCHEDULE (TOWER-3)

- 1. ALL DIMENSIONS ARE IN MM EXCEPT NOTED.
- 2. GRADE OF CONCRETE M40/M30
- 3. GRADE OF STEEL Fe500

EDEN INFRACON PRIVATE LIMITED
K. Sanyal
Director
CONSTITUTED ATTORNEY OF PYRAMID ENCLAVE (P) LTD

SIGNATURE OF OWNER
WE DO HEREBY CERTIFY THAT THE FOUNDATION AND SUPERSTRUCTURE OF THE BUILDING PROPOSED FOR CONSTRUCTION AT MUNICIPAL HOLDING NO.29,K.L.GOSWAMI SARANI, UNDER CIRCLE NO. 'F', OF THE SERAMPORE MUNICIPALITY COMPRISED IN L.R. DAG NOS. 2501, 2502, 2503, 2504, 2528, 2573, 2574, 2575, 2576, 2577, 2578, 2579, 2580, 2581, 2582, 2583, 2584, 2585, 2590, 2594, 2596, 2597, 2642, 2643, MOUZA: MAHESH, P.S. SERAMPORE, J.L.: 15, L.R. KHATIAN NO. 11337, P.O. SERAMPORE, PIN: 712201, DISTRICT HOOGHLY, WEST BENGAL, HAVE BEEN SO DESIGNED BY ME/US WILL MAKE SUCH FOUNDATION AND SUPERSTRUCTURE SAFE IN ALL RESPECT INCLUDING THE CONSIDERATION OF BEARING CAPACITY AND SETTLEMENT OF SOIL ETC.

MALAY KUMAR GHOSH
Regn. No. CA/92/14854
35A, Dr. Sarat Banerjee Road
Kolkata - 700 029

SIGNATURE OF ARCHITECT
MALAY KUMAR GHOSH
REGN. NO. CA/92/14854
35A, DR. SARAT BANERJEE ROAD, KOLKATA-700 029
KMC ENLISTMENT NO.180(A)


BIBIK BIKASH MULLICK
E.S.E. - 1/75
SIGNATURE OF STRUCTURAL ENGINEER
BIBIK BIKASH MULLICK
K. Sengupta
KOUSHIK SENGUPTA
B.E.(CIVIL), M.E. (STRUCTURE)
ESE - 1/76 (K.M.C.)
Sd/- OF STRUCTURAL REVIEWER

SIGNATURE OF GEOTECHNICAL ENGINEER
GEOTEST ENGINEERS PVT.LTD.
ALOK ROY
GTE - 1/11
6A, MILON PARK,GARIA,KOLKATA-700084,

DESIGNED - BBM
CHECKED - BBM
DEALT - P.P
DRG. NO - PMC/MUN/ST/SERAMPORE/03

STRUCTURAL CONSULTANT
P M CONSULTANT
35A, DR. SARAT BANERJEE ROAD, KOL.-29
PHONE- 9830461784,
e-mail- bibekbm@rediffmail.co

ESPACE
35-A, DR. SARAT BANERJEE ROAD, KOLKATA-700029
TeleFax : 91-33-2465-4130 / 4159
e-mail : espace@vsnl.net
WEBSITE : www.espaceindia.com

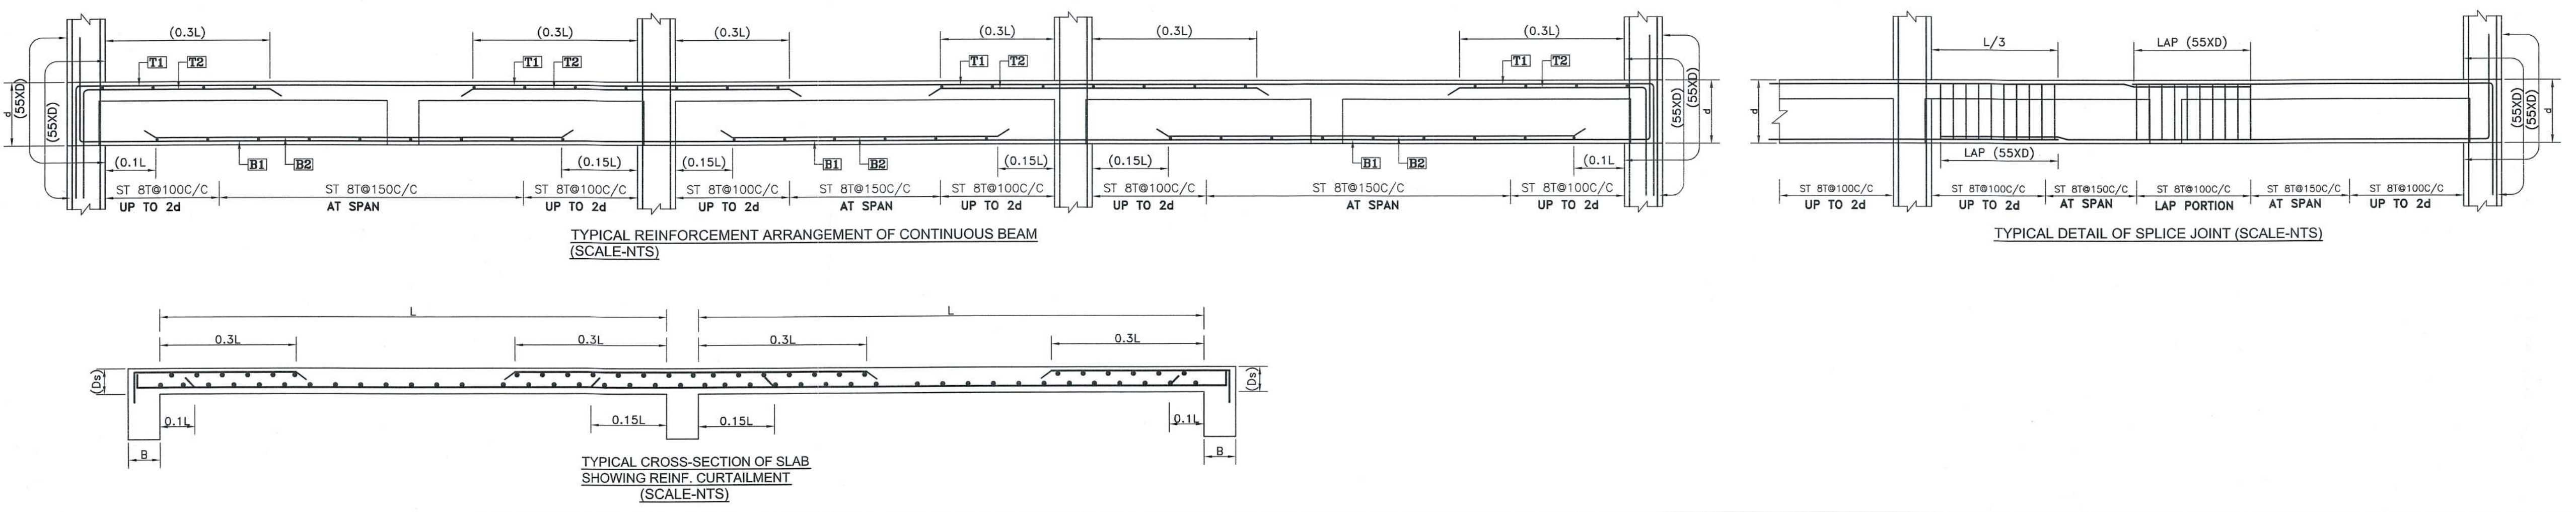

Petition No. 754 2018-19
 Permission for the new construction as
 proposed and change in the plan is granted
 Vide Sd No. B.O.C. 8
 B.O.C. Meeting Dt. 22-9-2018
 Dated..... 22/9/18

Serampore Municipality
 1. This plan is valid for three years and may
 be revalidated for the further two years on
 payment of new fees, charges with production
 of original plan showing the completion of new
 2. Within one month after the completion of new
 construction or a substantial portion thereof, the
 owner must be informed this to the Municipal
 Authority for interim assignment on a prescribed
 form.

The Plan has been drawn as
 per WBMB Rule 2007 and may
 be approved

Chandjit Chakraborty
 Urban Infrastructure Expert
 Serampore Municipality

Nirjonan
 Technical Advisor
 Retd. Civil MED
 Serampore Municipality

Bayen