


SIGNATURE OF L.B.S.

Partha Acharjee, L. B. S. No.- 1/339, 246A/5 N. S. C. Bose Road, Kolkata- 700 092

E.S.E. DECLARATION

The structural design and drawing of both foundation and super structure of the building has been made by me considering all possible loads including seismic load as per national building code of India and certified that it is a safe and stable in all respect. The recommendations of soil test report has been be considered during structural calculation.

Soil testing report has been done by Sankar Chakraborty for M/S. "ABCON" of 8/103, Bijoygarh, Kolkata - 700032.

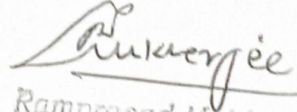

Ramprasad Mukherjee
B. C. E., M. E.

E.S.E. No - II/471

14-C, Khanpur Road

SIGNATURE OF E.S.E.

Ramprasad Mukherjee, E. S. E. No. - II/471, 14-C Khanpur Road, Kolkata- 700 047

OWNER DECLARATION

I do hereby declare with full responsibility that

I shall engage L.B.S. & E.S.E. during construction.

I follow the instruction of L.B.S. & E.S.E. during construction of the building. (as per B.S. plan)


K.M.C. authority will not be responsible for structural stability of the building and adjoining structures.

If any submitted documents are found to be fake, the K.M.C. authority will revoke the sanction plan.

The construction of water reservoir and septic tank will be undertaken under the guidance of E.S.E./L.B.S. before starting the building foundation work.

The plot was identified by me during departmental inspection.

NIRMAL BUILDERS



Proprietor

SIGNATURE OF OWNER

Sri. Nirmal Debnath sole proprietors of "M/S. NIRMAL BUILDERS"

**PROPOSED (G+III) STORIED RESIDENTIAL
BUILDING PLAN U/S 393A OF K.M.C. ACT
1980 & UNDER BUILDING RULE 2009,
COMPLYING NOTIFICATION
NO.-80/MA/O/C-4/3R-7/2017, DATED -
31.01.2018, AT THE PREMISES NO.- 163
SEIKH PARA WARD NO.- 111, BR.- XI,
KOLKATA -700 096, P.S.- BANSDRONI.
VIDE PLAN CASE NO.- 2018110558.**

RESIDENTIAL USE.



PARTY'S COPY

(11)

#


Before starting any Construction the site must conform with the plans sanctioned and all the conditions as proposed in the plan should be fulfilled.
The validity of the written permission to execute the work is subject to the above conditions.

CONSTRUCTION SITE SHALL BE MAINTAINED TO PREVENT MOSQUITO BREEDING AS REQUIRED U/S 496 (1) & (2) OF CMC ACT 1980. IN SUCH MANNER SO THAT ALL WATER COLLECTION & PARTICULARLY LIFT WELLS, VATS, BASEMENT CURING SITES, OPEN RECEPTACLES ETC. MUST BE EMPITED COMPLETELY TWICE A WEEK.

Non Commencement of Erection/ Re-Erection within Two Year will Require Fresh Application for Sanction.

The building materials that will be stacked on Road/Passage or Foot-path beyond 3-months or after construction of G. Floor, whichever is earlier may be seized forthwith by the K.M.C. at the cost and risk of the owner.

Plan Case No. - 2018110228

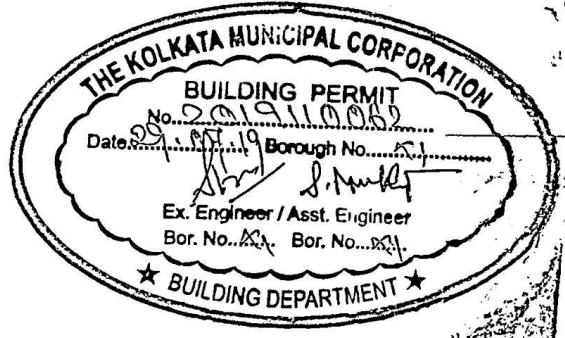

Plan for Water Supply arrangement including SEMILI G. & O. H. reservoirs should be submitted at the Office of the Ex-Engineer Water Supply and the sanction obtained before proceeding with the work of Water Supply any deviation may lead to disconnection/demolition.

THE SANCTION IS VALIED UP TO 02.07.2024

Design of all Structural Members including that of the foundation should conform to Standards specified in the National Building Code of India

No rain water pipe should be fixed or discharged on Road or Footpath. Drainage plan should be submitted at the Borough Executive Engineer's Office and the sanction obtained before proceeding with the drainage work.

A suitable pump has to be provided i.e. pumping unfiltered water for the distribution to the flushing cisterns and urinals in the building incase unfiltered water from street main is not available.

- A. Preventive measures need to be taken for pollution free environment:
- a) Wrap construction area/buildings with geotextile fabric installing dust barriers, or other actions, as appropriate for the location,
 - b) Apply water and maintain soils in a visible damp or crusted condition for temporary stabilization.
 - c) Apply water prior to leveling or any other earth moving activity to keep the soil moist throughout the process;
 - d) Limit vehicle speeds to 15 mph on the work site.
 - e) Clean wheels and undercarriage of haul trucks prior to leaving construction site.
 - f) Apply and maintain dust suppressant on haul routes.
 - g) Apply a cover or screen to stockpiles and stabilize stockpiles at completion of activity by water and maintain a dust palliative to all outer surfaces of the stockpiles;
 - h) Stabilize surface soils where loaders, support equipment and vehicles will operate by using water and maintain surface soils in a stabilized condition where loaders, support equipment and vehicles will operate;
 - i) Stabilize adjacent disturbed soils following paving activities with immediate landscaping activity or installation of vegetative or rock cover.
 - j) Maintain dust control during working hours and clean track out from paved surfaces at the end of the work shift/day. Track out must now extend 50 feet or more and must be cleaned daily, at the minimum.
 - k) Stabilize sloping surfaces using soil binders until vegetation or ground cover can effectively stabilize the slope,
 - l) Disposal of debris in consultation with the local authorities following proper environmental management practice.
 - m) During construction work, including cutting of marbles, ambient noise level should not exceed more than 65 dB(A).

DEVIATION WOULD HEAN DEMOLITION

RESIDENTIAL BUILDING

- B. Practices to be discarded for pollution free Environment:-
- a) Don't dispose of debris indiscriminately,
 - b) Don't allow the vehicles to run at high speed within the work site.
 - c) Don't cut materials without proper dust control/noise control facility.
 - d) Don't keep materials without effective cover.
 - e) Don't allow access in the work area except workers to limit soil disturbance and prevent access