



COLUMN SCHEDULE			
NO.	SECTION TO	SECTION TO	REMARKS
C1	FOUNDATION TO	SECOND FLOOR TO	
C2	SECOND FLOOR TO	ROOF	
C3	ROOF	ROOF	
C4	ROOF	ROOF	
C5	ROOF	ROOF	
C6	ROOF	ROOF	
C7	ROOF	ROOF	
C8	ROOF	ROOF	
C9	ROOF	ROOF	
C10	ROOF	ROOF	
C11	ROOF	ROOF	
C12	ROOF	ROOF	
C13	ROOF	ROOF	
C14	ROOF	ROOF	
C15	ROOF	ROOF	
C16	ROOF	ROOF	
C17	ROOF	ROOF	
C18	ROOF	ROOF	
C19	ROOF	ROOF	
C20	ROOF	ROOF	
C21	ROOF	ROOF	
C22	ROOF	ROOF	
C23	ROOF	ROOF	
C24	ROOF	ROOF	
C25	ROOF	ROOF	
C26	ROOF	ROOF	
C27	ROOF	ROOF	
C28	ROOF	ROOF	
C29	ROOF	ROOF	
C30	ROOF	ROOF	
C31	ROOF	ROOF	
C32	ROOF	ROOF	
C33	ROOF	ROOF	
C34	ROOF	ROOF	
C35	ROOF	ROOF	
C36	ROOF	ROOF	
C37	ROOF	ROOF	
C38	ROOF	ROOF	
C39	ROOF	ROOF	
C40	ROOF	ROOF	
C41	ROOF	ROOF	
C42	ROOF	ROOF	
C43	ROOF	ROOF	
C44	ROOF	ROOF	
C45	ROOF	ROOF	
C46	ROOF	ROOF	
C47	ROOF	ROOF	
C48	ROOF	ROOF	
C49	ROOF	ROOF	
C50	ROOF	ROOF	
C51	ROOF	ROOF	
C52	ROOF	ROOF	
C53	ROOF	ROOF	
C54	ROOF	ROOF	
C55	ROOF	ROOF	
C56	ROOF	ROOF	
C57	ROOF	ROOF	
C58	ROOF	ROOF	
C59	ROOF	ROOF	
C60	ROOF	ROOF	
C61	ROOF	ROOF	
C62	ROOF	ROOF	
C63	ROOF	ROOF	
C64	ROOF	ROOF	
C65	ROOF	ROOF	
C66	ROOF	ROOF	
C67	ROOF	ROOF	
C68	ROOF	ROOF	
C69	ROOF	ROOF	
C70	ROOF	ROOF	
C71	ROOF	ROOF	
C72	ROOF	ROOF	
C73	ROOF	ROOF	
C74	ROOF	ROOF	
C75	ROOF	ROOF	
C76	ROOF	ROOF	
C77	ROOF	ROOF	
C78	ROOF	ROOF	
C79	ROOF	ROOF	
C80	ROOF	ROOF	
C81	ROOF	ROOF	
C82	ROOF	ROOF	
C83	ROOF	ROOF	
C84	ROOF	ROOF	
C85	ROOF	ROOF	
C86	ROOF	ROOF	
C87	ROOF	ROOF	
C88	ROOF	ROOF	
C89	ROOF	ROOF	
C90	ROOF	ROOF	
C91	ROOF	ROOF	
C92	ROOF	ROOF	
C93	ROOF	ROOF	
C94	ROOF	ROOF	
C95	ROOF	ROOF	
C96	ROOF	ROOF	
C97	ROOF	ROOF	
C98	ROOF	ROOF	
C99	ROOF	ROOF	
C100	ROOF	ROOF	

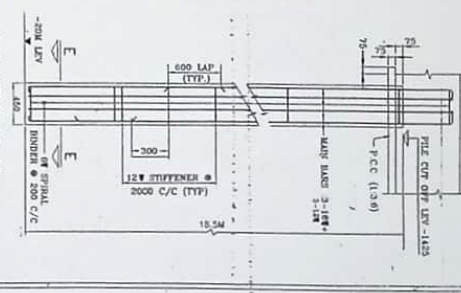

TYPE DETAIL OF 400 DIA R.C.C. BORED CAST-IN-SITU PILE



SECTION E-E
P.C. OF 400 DIA

NOTE - FOR COLUMN AND C/C/C/C PILE CUT OFF LVL IS -1775mm FROM CL.

NOTES

1. ALL DIMENSIONS ARE IN mm UNLESS OTHERWISE SPECIFIED.
2. CONCRETE SHALL BE OF GRADE M20.
3. ALL REINFORCING STEEL FOR R.C.C. WORK SHALL BE GR40.
4. ALL REINFORCING STEEL SHALL BE PROVIDED WITH PROPER BENDS AND LAP JOINTS.
5. ALL REINFORCING STEEL SHALL BE PROVIDED WITH PROPER BENDS AND LAP JOINTS.
6. ALL REINFORCING STEEL SHALL BE PROVIDED WITH PROPER BENDS AND LAP JOINTS.
7. FOR ALL R.C.C. WORK, WATER & CEMENT RATIO SHALL BE WITHIN 0.50 TO 0.55 WITH A MAXIMUM 100.

PROPOSED G+IV STORED RESIDENTIAL BUILDING PLAN UNDER SECTION 393A OF KMC ACT 1980 AND AS PER B/R 2009 AT PREMISES NO.- 194 BARA KHOLA WARD-109, BOROUGH-VII, R.S. DAG NO.-143, R.S. KHATIAN NO.-147, J.L. NO.-21, PLOT NO.-90(B), L.R. KHATIAN NO.-527, MOUDA-BARAHOLA, P.S.-PURBA JADAVPUR, DIST.-24 PARGANAS (S), UNDER KMC, KOLKATA-700099.


LAYOUT MARKING PLAN OF THE BEAM CAP-IT BEAM SCHEDULE OF COLUMN-ITC DETAILS OF GRADE BEAM, PILE, PILE CAP, THE BEAM, LIFT PIT




CREATING FUTURE FOR YOU
SINCE 1980

DATE: 10/10/2024
DRAWN BY: [Name]
CHECKED BY: [Name]
SCALE: 1/100


LAYOUT MARKING PLAN OF THE BEAM

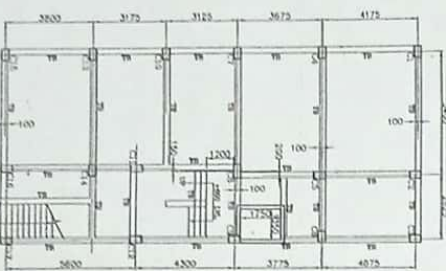


PLAN SHOWING ARRANGEMENT OF REINFORCEMENT FOR 400-3-PILE GROUP CAP




DETAIL OF LIFT PIT




8500 MM WIDE K.M.C. ROAD

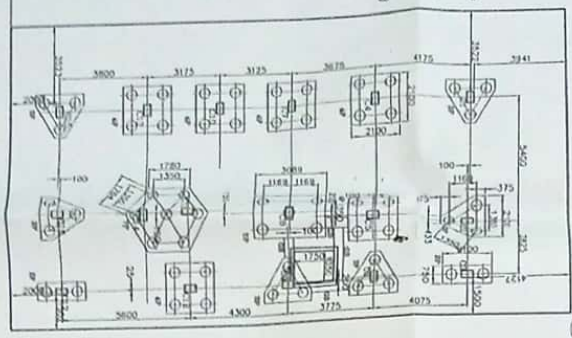


PLAN SHOWING ARRANGEMENT OF REINFORCEMENT FOR 400-3-PILE GROUP CAP




PLAN SHOWING ARRANGEMENT OF REINFORCEMENT FOR 400-3-PILE GROUP CAP



PLAN SHOWING ARRANGEMENT OF REINFORCEMENT FOR 400-3-PILE GROUP CAP



PLAN SHOWING ARRANGEMENT OF REINFORCEMENT FOR 400-3-PILE GROUP CAP



PLAN SHOWING ARRANGEMENT OF REINFORCEMENT FOR 400-3-PILE GROUP CAP

